



Inspur Server NF5180M6 White Paper

Document Version: V1.0
Release Date: January 4th, 2023

Copyright © 2023 Inspur Electronic Information Industry Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Inspur.

Environmental Protection

Please dispose of product packaging by recycling at a local recycling center for a greener planet.

Trademarks

Inspur and the Inspur logo are registered trademarks of Inspur.

All other trademarks or registered trademarks mentioned herein are the property of their respective holders. This document does not mark any product or brand with symbol (® or ™).

Security Statement

Inspur is intensely focused on server product safety and has placed a high priority on this. For a better understanding of our server products, carefully read through the following security risk statements.

- When servers are to be repurposed or retired, it is recommended to restore their firmware factory settings, delete information and clear logs from BIOS and BMC to protect data privacy. Meanwhile, we recommend you to wipe the drive data thoroughly and securely with trusted erasing tools. (You can use Inspur Server Quick Provisioning. Contact us for specific server models to which ISQP is applicable.)
- For server open source software statements, please contact Inspur Customer Service.
- Some interfaces and commands for production, assembly and return-to-depot, and advanced commands for locating faults, if used improperly, may cause equipment abnormality or business interruption. This is not described herein. Please contact Inspur for such information.
- External ports of Inspur servers do not use private protocols for communication.
- Our products will not initiatively obtain or use your personal data. Only when you consent to use certain functions or services, some personal data such as IP address and email address for alerts may be obtained or used during business operation or fault location. Inspur has implemented necessary measures on product functions to ensure personal data security throughout the data lifecycle, including but not limited to data collection, storage, use, transmission, and destruction. Meanwhile,

you are obligated to establish necessary user privacy policies in accordance with applicable national/regional laws and regulations to fully protect user personal data.

- Committed to product data security, Inspur has implemented necessary measures on product functions to protect system operation and security data throughout its lifecycle in strict accordance with relevant laws, regulations and supervision requirements. As the owner of system operation and security data, you are obligated to establish necessary data security policies and take adequate measures in accordance with applicable national/regional laws and regulations to fully protect system operation and security data.
- Inspur will remain committed to the safety of our products and solutions to achieve better customer satisfaction. Inspur has established emergency response procedures and action plans for security vulnerabilities, so that product safety issues can be dealt with in a timely manner. Please contact Inspur Customer Service for any safety problems found or necessary support on security vulnerabilities when using our products.

Disclaimer

The purchased products, services and features shall be bound by the contract made between Inspur and the customer. All or part of the products, services and features described herein may not be within your purchase or usage scope. Unless otherwise agreed in the contract, Inspur makes no express or implied statement or warranty on the contents herein. Images provided herein are for reference only and may contain information or features that do not apply to your purchased model. This document is only used as a guide. Inspur shall not be liable for any damage, including but not limited to loss of profits, loss of information, interruption of business, personal injury, or any consequential damage incurred before, during, or after the use of our products. Inspur assumes you have sufficient knowledge of servers and are well trained in protecting yourself from personal injury or preventing product damages during operation and maintenance. The information in this document is subject to change without notice. Inspur shall not be liable for technical or editorial errors or omissions contained in this document.

Technical Support

| | |
|-------------------------|--|
| Global Service Hotline: | (+1) 844-860-0011/(+1) 325-880-0011 |
| Address: | No. 1036 Langchao Road, Jinan, China Inspur Electronic Information Industry Co., Ltd. |
| Postal Code: | 250101 |
| Email: | serversupport@inspur.com |

Abstract

This document describes the NF5180M6 server's appearance, features, performance parameters, and software and hardware compatibility, providing in-depth information of NF5180M6.






Intended Audience

This document is intended for:

- Inspur pre-sales engineers
- Pre-sales engineers of channel partners
- Enterprise pre-sales engineers

Symbol Conventions

The symbols that may be found in this document are defined as follows.

| Symbol | Description |
|---|--|
|  DANGER | A potential for serious injury, or even death if not properly handled |
|  WARNING | A potential for minor or moderate injury if not properly handled |
|  CAUTION | A potential loss of data or damage to equipment if not properly handled |
|  IMPORTANT | Operations or information that requires special attention to ensure successful installation or configuration |
|  NOTE | Supplementary description of document information |

Revision History

| Version | Date | Description of Changes |
|---------|-----------|---|
| V1.0 | 2021/6/28 | Initial release |
| V1.1 | 2023/1/4 | Optimized the document content and format |

Table of Contents

| | | |
|--------|---------------------------------------|----|
| 1 | Product Overview | 1 |
| 2 | Features | 3 |
| 2.1 | Scalability and Performance | 3 |
| 2.2 | Availability and Serviceability | 4 |
| 2.3 | Manageability and Security..... | 4 |
| 2.4 | Energy Efficiency | 5 |
| 3 | System Parts Breakdown | 6 |
| 4 | System Logical Diagram | 7 |
| 5 | Hardware Description..... | 8 |
| 5.1 | Front Panel..... | 8 |
| 5.1.1 | Appearance | 8 |
| 5.1.2 | LEDs and Buttons..... | 10 |
| 5.1.3 | Ports | 15 |
| 5.2 | Rear Panel..... | 17 |
| 5.2.1 | Appearance | 17 |
| 5.2.2 | LEDs and Buttons..... | 18 |
| 5.2.3 | Ports | 19 |
| 5.3 | Processors..... | 21 |
| 5.4 | Memory | 22 |
| 5.4.1 | DDR4 DIMMs | 22 |
| 5.4.2 | PMems | 30 |
| 5.5 | Storage | 36 |
| 5.5.1 | Drive Configurations | 36 |
| 5.5.2 | Drive Numbering | 39 |
| 5.5.3 | Drive LEDs | 43 |
| 5.5.4 | RAID Controller Cards | 44 |
| 5.6 | Network | 44 |
| 5.7 | I/O Expansion | 44 |
| 5.7.1 | PCIe Cards..... | 44 |
| 5.7.2 | PCIe Slots | 45 |
| 5.7.3 | PCIe Slot Description..... | 47 |
| 5.8 | PSUs..... | 48 |
| 5.9 | Fans | 48 |
| 5.10 | LCD Module (Optional) | 49 |
| 5.10.1 | Function..... | 49 |
| 5.10.2 | Interface | 51 |

| | | |
|--------|---|----|
| 5.11 | Boards..... | 52 |
| 5.11.1 | Motherboard | 52 |
| 5.11.2 | Drive Backplanes | 53 |
| 6 | Product Specifications | 60 |
| 6.1 | Technical Specifications | 60 |
| 6.2 | Environmental Specifications..... | 61 |
| 6.3 | Physical Specifications | 64 |
| 7 | Operating System and Hardware Compatibility | 65 |
| 7.1 | Supported Operating Systems | 65 |
| 7.2 | Hardware Compatibility | 66 |
| 7.2.1 | CPU Specifications | 66 |
| 7.2.2 | Memory Specifications..... | 67 |
| 7.2.3 | Drive Specifications | 67 |
| 7.2.4 | SAS/RAID Controller Card Specifications | 68 |
| 7.2.5 | NIC Specifications | 69 |
| 7.2.6 | HBA and HCA Card Specifications | 70 |
| 7.2.7 | Graphics Card Specifications | 71 |
| 7.2.8 | PSU Specifications | 71 |
| 8 | Regulatory Information | 73 |
| 8.1 | Safety..... | 73 |
| 8.1.1 | General..... | 73 |
| 8.1.2 | Personal Safety..... | 73 |
| 8.1.3 | Equipment Safety | 75 |
| 8.1.4 | Transportation Precautions | 76 |
| 8.1.5 | Manual Handling Weight Limits..... | 76 |
| 9 | Inspur Limited Warranty | 77 |
| 9.1 | Warranty Service | 77 |
| 9.1.1 | Remote Technical Support..... | 77 |
| 9.1.2 | RMA Service | 78 |
| 9.1.3 | ARMA Service | 79 |
| 9.1.4 | 9 × 5 × NBD Onsite Service | 79 |
| 9.1.5 | 24 × 7 × 4 Onsite Service | 80 |
| 9.2 | Inspur Service SLA | 80 |
| 9.3 | Warranty Exclusions | 80 |
| 10 | System Management..... | 82 |
| 10.1 | Intelligent Management System ISBMC | 82 |
| 10.2 | Inspur Physical Infrastructure Manager (ISPIM)..... | 85 |
| 10.3 | Inspur Server Intelligent Boot (ISIB)..... | 87 |

| | | |
|------|--|-----|
| 11 | Certifications | 89 |
| 12 | Appendix A..... | 90 |
| 12.1 | Operating Temperature Specification Restrictions | 90 |
| 12.2 | Model..... | 91 |
| 12.3 | RAS Features | 91 |
| 12.4 | Sensor List..... | 92 |
| 13 | Appendix B Acronyms and Abbreviations | 96 |
| 13.1 | A - E..... | 96 |
| 13.2 | F - J..... | 97 |
| 13.3 | K - O | 98 |
| 13.4 | P - T..... | 99 |
| 13.5 | U - Z | 100 |

1 Product Overview

The Inspur NF5180M6 is a 1U 2-socket high-density computing rack server. Powered by Intel Xeon Scalable processors on the Intel Whitley platform, it maximizes the performance, density, and scalability of the server. It is adaptable for computing-intensive workloads such as virtualization, high-performance computing, and online computing. Hence, it can meet the deployment requirements of high-density data centers.

Figure 1-1 NF5180M6 - 4 × 3.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration

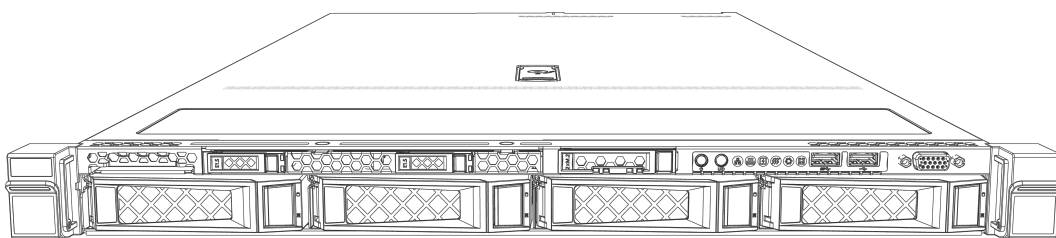


Figure 1-2 NF5180M6 - 4 × 3.5-inch Drive + 4 × 2.5-inch Drive Configuration

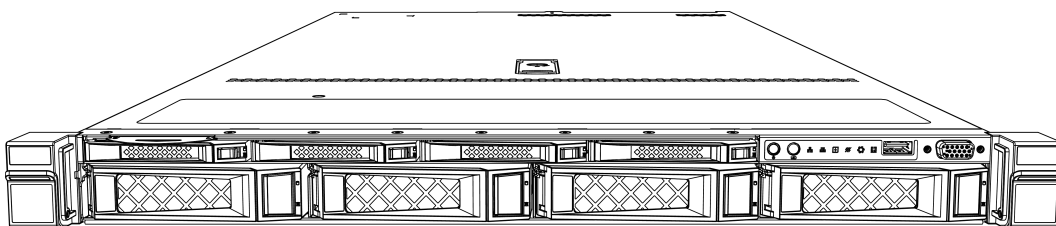


Figure 1-3 NF5180M6 - 10 × 2.5-inch Drive Configuration

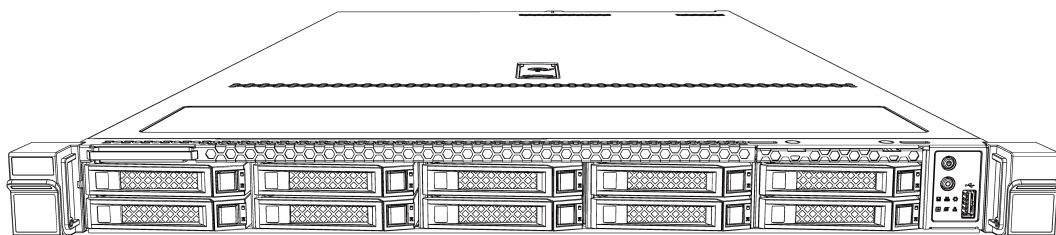


Figure 1-4 NF5180M6 - 8 × 2.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration

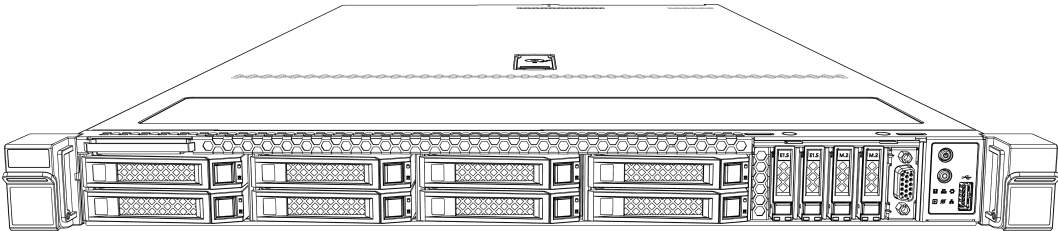


Figure 1-5 NF5180M6 - 12 × 2.5-inch Drive Configuration

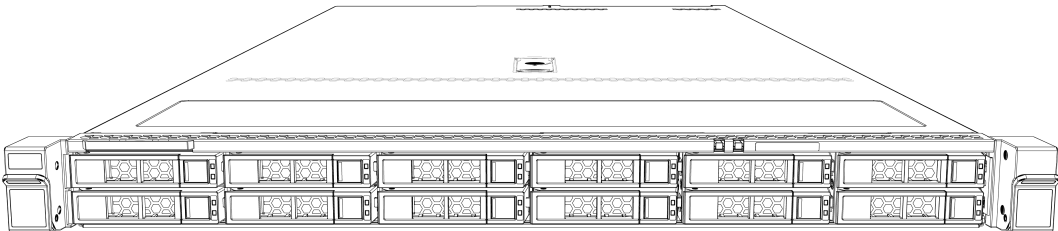


Figure 1-6 NF5180M6 - 32 × E1.S Configuration


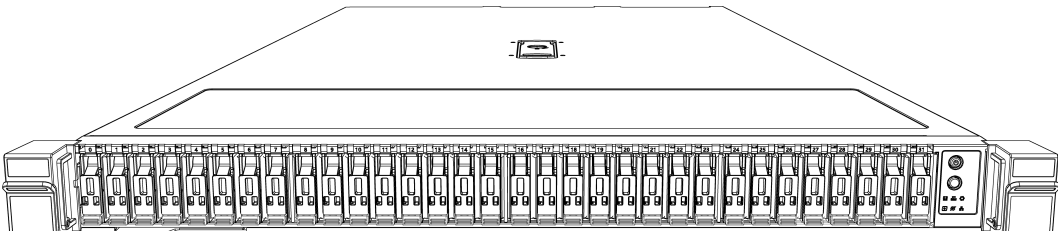


Figure 1-7 NF5180M6 - EVAC Heatsink Configuration

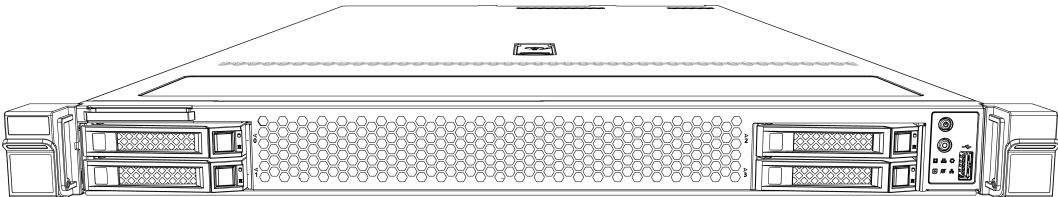

2 Features

2.1 Scalability and Performance

- Scalability
 - Up to 12 front 2.5-inch SAS/SATA/NVMe drives + 2 rear 2.5-inch SAS/SATA drives or up to 32 front E1.S SSDs.
 - 1 optional OCP 3.0 card of 1/10/25/40/100 Gb, delivering more flexible network architectures.
 - Up to 3 standard PCIe 4.0 x16 expansion cards of diverse form factors, meeting different customer needs.
 - Optional front M.2 SSDs and E1.S SSDs, satisfying diverse storage demands.
 - 2 onboard SATA M.2 SSDs or 2 internal PCIe x4 M.2 SSDs.
- Performance
 - Up to two 3rd Gen Intel Xeon Scalable processors with up to 40 cores per processor, a base frequency of up to 3.6 GHz, a TDP of up to 270 W and 3 UPI links per processor at up to 11.2 GT/s, bringing an overall computing performance increase by 46%.
 - Up to 32 DDR4 ECC DIMMs (3,200 MT/s, RDIMM/LRDIMM/NVDIMM, up to 128 GB per memory module) with the total memory capacity up to 10 TB when used with BPS, delivering superior speeds and high availability.
 - Supports Intel Optane PMem 200 series of up to 512 GB per memory module and 3,200 MHz, ensuring memory data integrity in case of power failure without compromising on the memory capacity and bandwidth.
 - Up to 12 hot-swap all-flash NVMe SSDs, providing an IOPS ten times that of high-end enterprise-grade SATA SSDs and a 20% storage capacity increase over the M5 counterpart.
 - Up to 32 hot-swap all-flash E1.S SSDs, delivering high IOPS like traditional NVMe SSDs, massive storage in 1U space thanks to its small form factor and 3.2 times overall IOPS performance.

2.2 Availability and Serviceability

- Based on humanization design, the server allows tool-less maintenance. The enhanced and optimized structural parts enable quick removal/installation, greatly reducing O&M time.
- Inspur's unique intelligent control technology combined with the cutting-edge air-cooling technology creates an optimum working environment to ensure the stable running of the server.
- The server supports hot-swap storage drives and 3 RAID controller cards with RAID levels 0, 1, 10, 5, 6, 60 and 1E, RAID cache and data protection enabled by the super-capacitor in case of power failures.
- With the latest BMC technologies, the UID LED on the front panel enables technicians to identify the failed system, and the BMC Web GUI and LEDs for fault diagnosis can quickly lead technicians to failed (or failing) components, simplifying maintenance, speeding up troubleshooting, and enhancing system availability.
- The BMC can monitor system parameters and send alerts in advance, so that technicians can take appropriate measures in time to ensure the stable running of the server and reduce the downtime.

For documentation of the NF5180M6 system, such as product marketing materials, user manuals, product drivers, firmware, and product certifications, visit Inspur website: <https://en.inspur.com>.

2.3 Manageability and Security

- Manageability
 - Supports ISBMC, a self-developed remote server management system.
 - ISBMC supports such mainstream management specifications in the industry as IPMI 2.0 and Redfish 1.8.
 - ISBMC improves operational reliability.
 - ISBMC features easy serviceability for different business scenarios.
 - ISBMC provides comprehensive and accurate fault diagnosis capabilities.
 - ISBMC offers industry-leading security reinforcement capabilities.
 - The intelligent management software ISPIM allows centralized management of the server and full lifecycle management covering part-level asset management, intelligent monitoring and alerting, automatic inspection, fault diagnosis and reporting, energy consumption management, and firmware update/configuration.


- The ISIB system enables rapid server initialization and supports batch RAID configuration and OS deployment.
- Security
 - In terms of hardware design, the motherboard and backplanes are equipped with overcurrent and overvoltage protection functions, and the onboard connectors and cables are designed to be fool-proof. Hence, the server is capable of protecting itself against overload impacts
 - As to structural security, the server is designed with a hood latch on the top cover and a lock on the front bezel. Its intrusion switch sends a real-time alert upon an intrusion into the chassis.
 - As for hardware ports, all physical I/O ports are clearly defined. An access control mechanism is established for the service ports to prevent malicious operations by unauthorized personnel.
 - Regarding firmware security, images are signed with secure encryption algorithms before release, and the signature must be validated before firmware update, ensuring the integrity and legitimacy of the firmware.
 - The intelligent management system ISBMC provides various security features such as identification and authentication, authorization and access control, Web GUI security configuration, and log audit, offering industry-leading security reinforcement capabilities.
 - The optional TPM/TCM ensures data security and secure boot of the server.

2.4 Energy Efficiency

- Equipped with 80 Plus Platinum level PSUs (550 to 1,300 W) with the power efficiency up to 94% at a load of 50%.
- Offers 1+1 redundant PSUs with AC/DC input support for improved system reliability.
- Features high-efficiency single-board voltage regulator down (VRD) solutions, reducing DC-DC conversion loss.
- Supports intelligent fan speed control and intelligent CPU frequency scaling, conserving energy.
- Adopts ultimate heat dissipation design and optimized fan models, and honeycomb layer waveguide boards for improved HDD RV (Rotational Vibration) performance.
- With the introduction of the EVAC solution, the 1U space now accommodates two 270 W CPUs, enabling worry-free deployment in high-density server rooms.

3 System Parts Breakdown

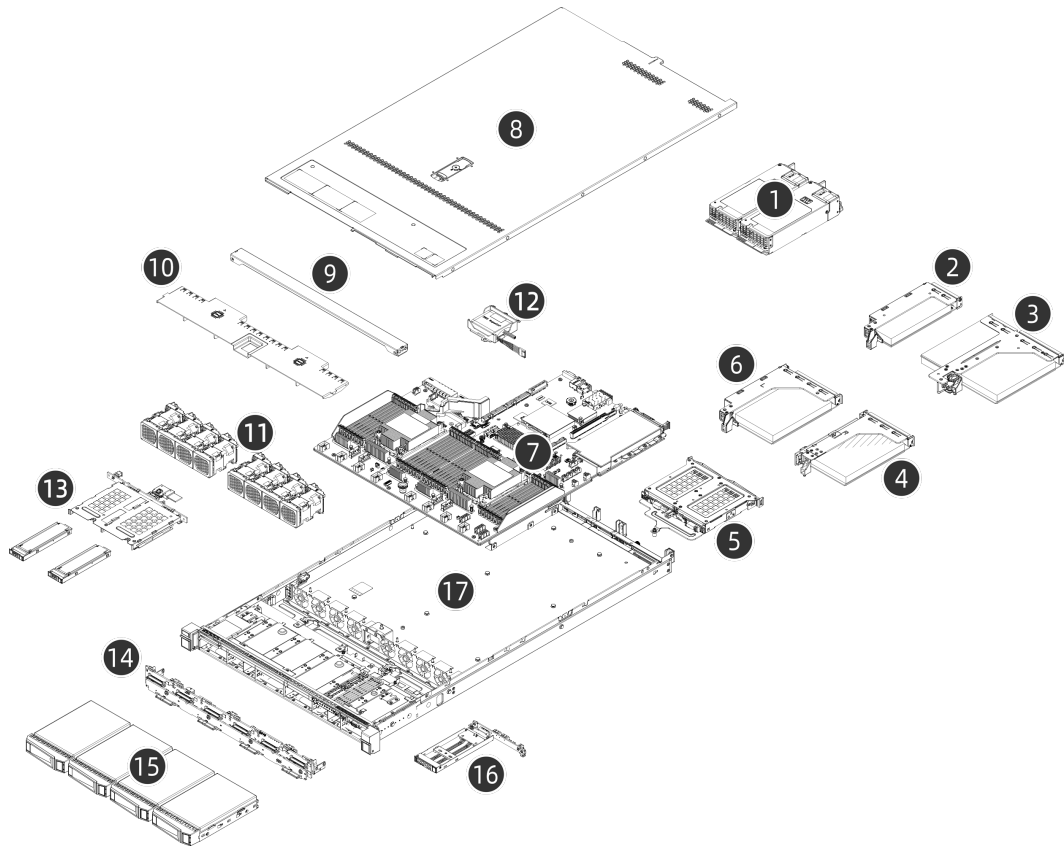
Figure 3-1 Exploded View (Demonstrated with 4 × 3.5-inch Drive Configuration)



| Item | Feature | Item | Feature |
|------|------------------------------------|------|--|
| 1 | PSU × 2 | 2 | LP PCIe Riser-Card Assembly |
| 3 | Butterfly PCIe Riser-Card Assembly | 4 | Right FHHL PCIe Riser-Card Assembly (view the server from the front) |
| 5 | Rear 2.5-inch Drive × 2 | 6 | Left FHHL PCIe Riser-Card Assembly (view the server from the front) |
| 7 | Motherboard | 8 | Top Cover |
| 9 | Reinforcement Crossbar | 10 | Air Duct |
| 11 | Fan Module × 8 | 12 | Super-Capacitor Module |
| 13 | E1.S SSD × 2 | 14 | 4 × 3.5-inch Drive Backplane |
| 15 | 3.5-inch Drive × 4 | 16 | M.2 SSD Module (with 2 M.2 SSDs) |
| 17 | 3.5-inch Drive Chassis | | |

4 System Logical Diagram

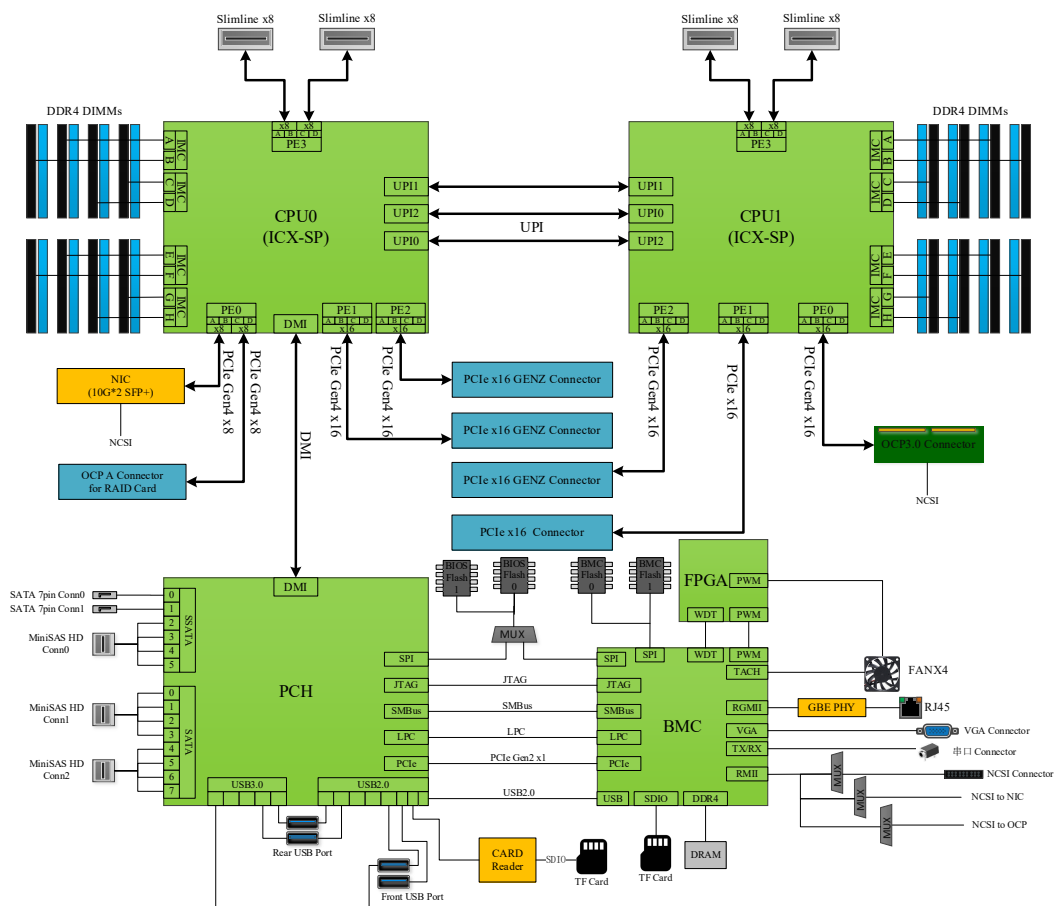Figure 4-1 System Logical Diagram




- The NF5180M6 supports up to 2 Intel Xeon Scalable processors and up to 32 DDR4 DIMMs.
- Processors are interconnected through 3 UPI links at up to 11.2 GT/s.
- Processors are connected to the 3 PCIe slots on the motherboard through PCIe buses, supporting up to 2 PCIe 4.0 x16 FHHL cards or 2 PCIe 4.0 x16 HHHL cards + 1 PCIe 4.0 x16 FHHL card.
- The onboard mezz RAID controller card or the 2 NVMe M.2 SSDs are connected to CPU0 through the PCIe bus. With SAS signal cables, the mezz RAID controller card connects to different drive backplanes, enabling different storage drives specifications.

5 Hardware Description

5.1 Front Panel


5.1.1 Appearance

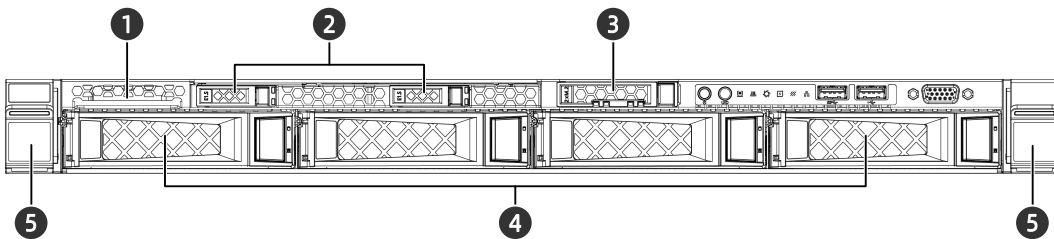Figure 5-1 Front View of 4 × 3.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration




| Item | Feature | Item | Feature |
|------|--|------|------------------------|
| 1 | Serial Label Pull Tag (including SN and drive numbers) | 2 | E1.S SSD Bay × 2 |
| 3 | M.2 SSD Bay (with 2 M.2 SSDs) | 4 | 3.5-inch Drive Bay × 4 |
| 5 | Ear Latch × 2 | | |

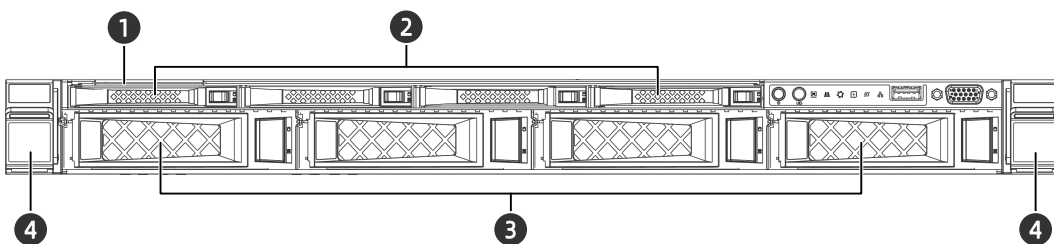Figure 5-2 Front View of 4 × 3.5-inch Drive + 4 × 2.5-inch Drive Configuration




| Item | Feature | Item | Feature |
|------|--|------|------------------------|
| 1 | Serial Label Pull Tag (including SN and drive numbers) | 2 | 2.5-inch Drive Bay × 4 |
| 3 | 3.5-inch Drive Bay × 4 | 4 | Ear Latch × 2 |

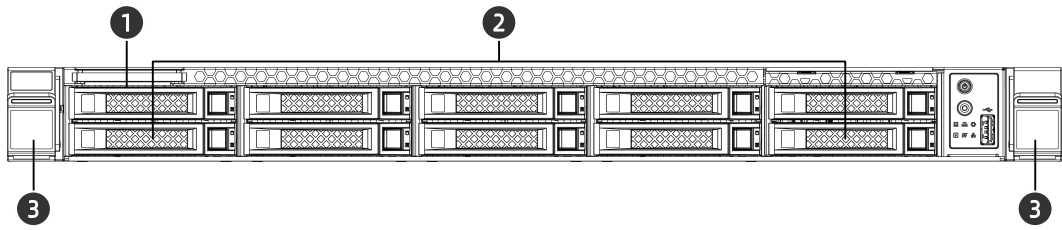● Figure 5-3 Front View of 10 × 2.5-inch Drive Configuration




| Item | Feature | Item | Feature |
|------|--|------|-------------------------|
| 1 | Serial Label Pull Tag (including SN and drive numbers) | 2 | 2.5-inch Drive Bay × 10 |
| 3 | Ear Latch × 2 | | |

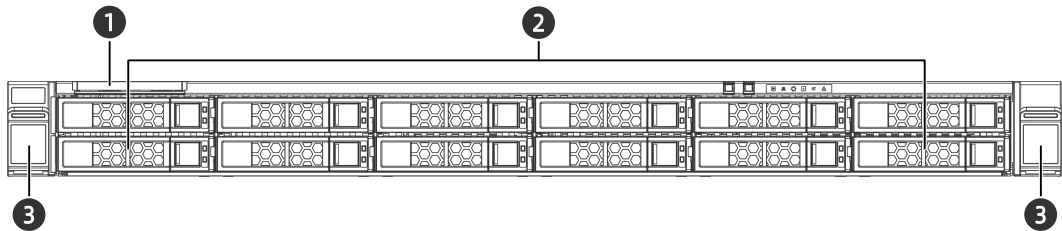Figure 5-4 Front View of 12 × 2.5-inch Drive Configuration



| Item | Feature | Item | Feature |
|------|--|------|-------------------------|
| 1 | Serial Label Pull Tag (including SN and drive numbers) | 2 | 2.5-inch Drive Bay × 12 |
| 3 | Ear Latch × 2 | | |

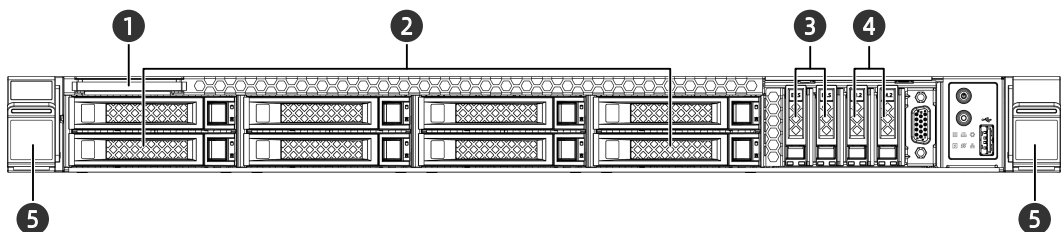
Figure 5-5 Front View of 8 × 2.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration



| Item | Feature | Item | Feature |
|------|--|------|------------------------|
| 1 | Serial Label Pull Tag (including SN and drive numbers) | 2 | 2.5-inch Drive Bay × 8 |
| 3 | E1.S SSD Bay × 2 | 4 | M.2 SSD Bay × 2 |


| Item | Feature | Item | Feature |
|------|---------------|------|---------|
| 5 | Ear Latch × 2 | | |

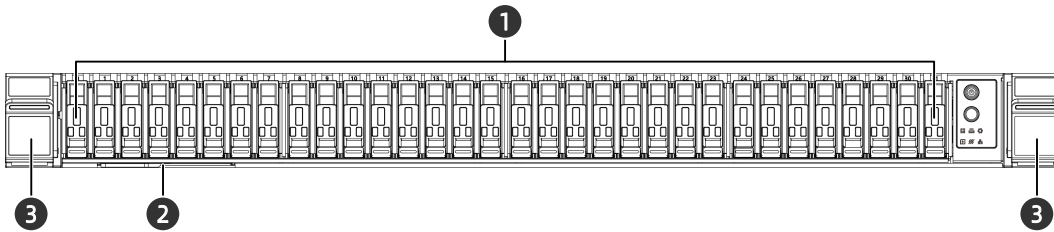Figure 5-6 Front View of 32 × E1.S SSD Configuration



| Item | Feature | Item | Feature |
|------|-------------------|------|--|
| 1 | E1.S SSD Bay × 32 | 2 | Serial Label Pull Tag (including SN and drive numbers) |
| 3 | Ear Latch × 2 | | |

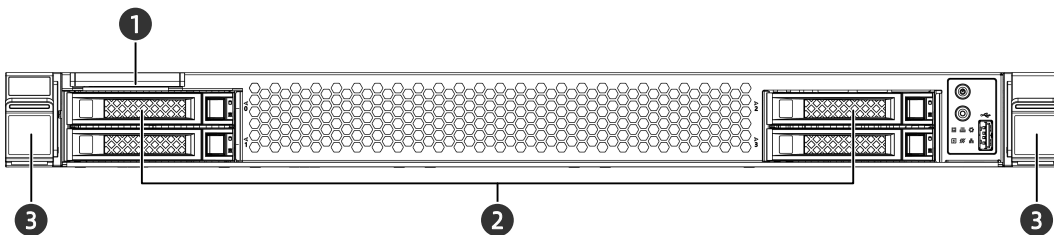
Figure 5-7 Front View of EVAC Heatsink Configuration



| Item | Feature | Item | Feature |
|------|--|------|------------------------|
| 1 | Serial Label Pull Tag (including SN and drive numbers) | 2 | 2.5-inch Drive Bay × 4 |
| 3 | Ear Latch × 2 | | |


5.1.2 LEDs and Buttons

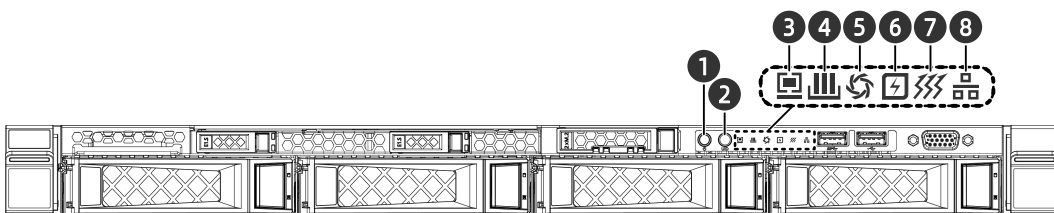Figure 5-8 Front Panel LEDs and Buttons of 4 × 3.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration




| Item | Feature | Item | Feature |
|------|----------------------|------|----------------------------|
| 1 | Power Button and LED | 2 | UID/BMC RST Button and LED |
| 3 | System Status LED | 4 | Memory Status LED |
| 5 | Fan Status LED | 6 | Power Status LED |
| 7 | System Overheat LED | 8 | Network Status LED |

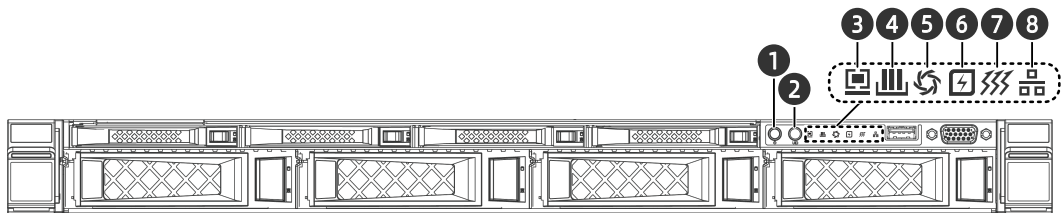Figure 5-9 Front Panel LEDs and Buttons of 4 × 3.5-inch Drive + 4 × 2.5-inch Drive Configuration




| Item | Feature | Item | Feature |
|------|----------------------|------|----------------------------|
| 1 | Power Button and LED | 2 | UID/BMC RST Button and LED |
| 3 | System Status LED | 4 | Memory Status LED |
| 5 | Fan Status LED | 6 | Power Status LED |
| 7 | System Overheat LED | 8 | Network Status LED |

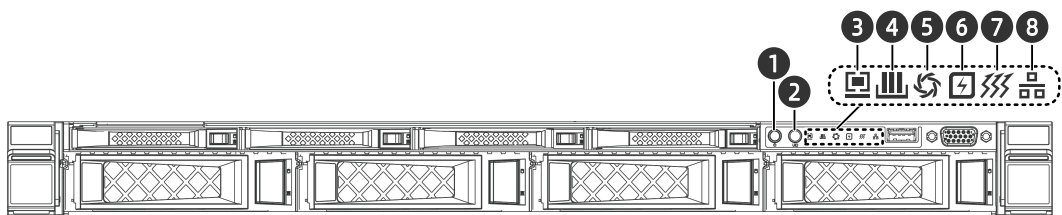Figure 5-10 Front Panel LEDs and Buttons of 10 × 2.5-inch Drive Configuration




| Item | Feature | Item | Feature |
|------|----------------------|------|----------------------------|
| 1 | Power Button and LED | 2 | UID/BMC RST Button and LED |
| 3 | System Status LED | 4 | Memory Status LED |
| 5 | Power Status LED | 6 | Network Status LED |
| 7 | System Overheat LED | 8 | Fan Status LED |

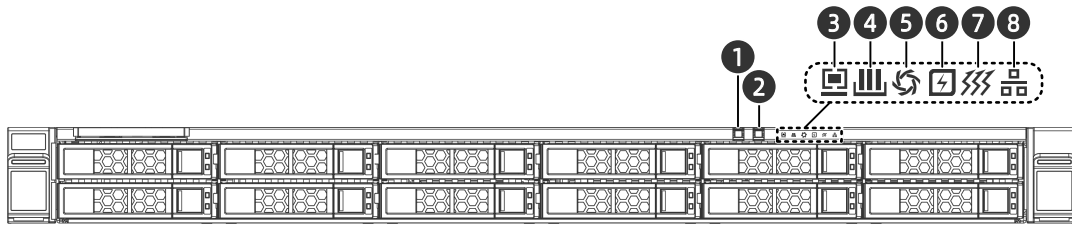Figure 5-11 Front Panel LEDs and Buttons of 12 × 2.5-inch Drive Configuration




| Item | Feature | Item | Feature |
|------|----------------------|------|----------------------------|
| 1 | Power Button and LED | 2 | UID/BMC RST Button and LED |
| 3 | System Status LED | 4 | Memory Status LED |
| 5 | Fan Status LED | 6 | Power Status LED |
| 7 | System Overheat LED | 8 | Network Status LED |

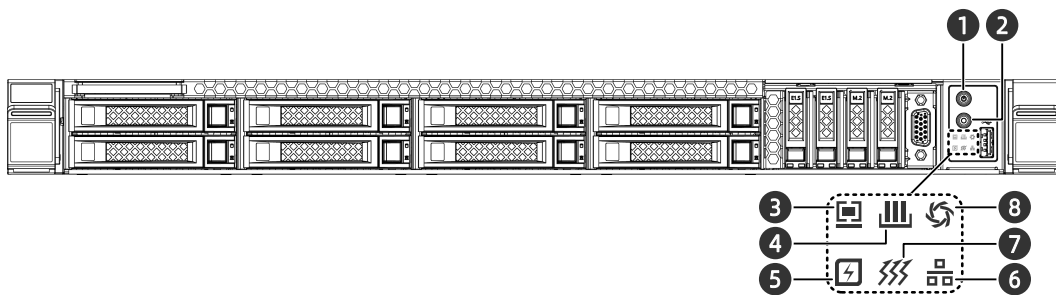Figure 5-12 Front Panel LEDs and Buttons of 8 × 2.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration




| Item | Feature | Item | Feature |
|------|----------------------|------|----------------------------|
| 1 | Power Button and LED | 2 | UID/BMC RST Button and LED |
| 3 | System Status LED | 4 | Memory Status LED |
| 5 | Power Status LED | 6 | Network Status LED |
| 7 | System Overheat LED | 8 | Fan Status LED |

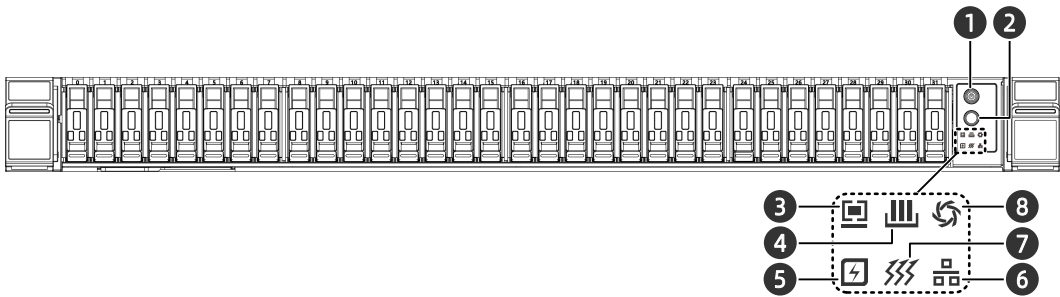Figure 5-13 Front Panel LEDs and Buttons of 32 × E1.5 SSD Configuration



| Item | Feature | Item | Feature |
|------|----------------------|------|----------------------------|
| 1 | Power Button and LED | 2 | UID/BMC RST Button and LED |
| 3 | System Status LED | 4 | Memory Status LED |
| 5 | Power Status LED | 6 | Network Status LED |
| 7 | System Overheat LED | 8 | Fan Status LED |



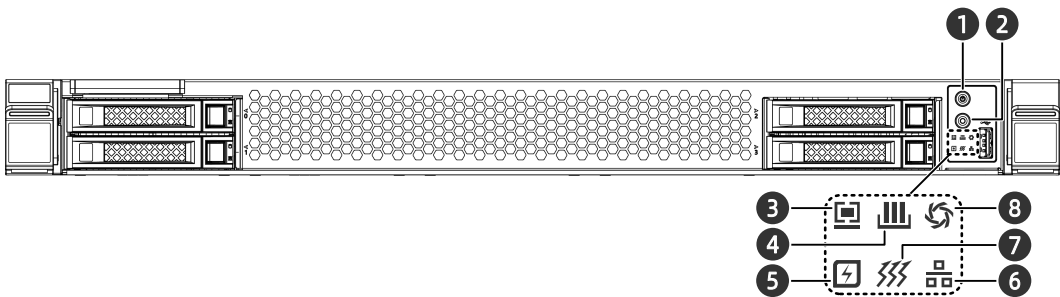

Figure 5-14 Front Panel LEDs and Buttons of EVAC Heatsink Configuration







| Item | Feature | Item | Feature |
|------|----------------------|------|----------------------------|
| 1 | Power Button and LED | 2 | UID/BMC RST Button and LED |
| 3 | System Status LED | 4 | Memory Status LED |
| 5 | Power Status LED | 6 | Network Status LED |
| 7 | System Overheat LED | 8 | Fan Status LED |

1. LED and Button Description


Table 5-1 Front Panel LED and Button Description

| Icon | LED & Button | Description |
|---|----------------------------|--|
|  | Power Button and LED | <p>Power LED:</p> <ul style="list-style-type: none"> • Off = No power • Solid green = Power-on state • Solid orange = Standby state <p>Power button:</p> <ul style="list-style-type: none"> • Long press 6 seconds to force a shutdown from the power-on state. <p>Notes:</p> <ul style="list-style-type: none"> • Follow the prompt under the OS to shut down the OS. • Short press the power button to power on the system in standby state. |
|  | UID/BMC RST Button and LED | <p>The UID LED is used to identify the device to be operated:</p> <ul style="list-style-type: none"> • Off = System unit not identified • Solid blue = System unit identified • Flashing blue = System unit being operated remotely <p>Notes:</p> <ul style="list-style-type: none"> • The UID LED turns on when activated by the UID button or via ISBMC remotely. • Long press the UID button for over 6 seconds to reset the BMC. |
|  | Memory Status LED | <ul style="list-style-type: none"> • Off = Normal • Flashing red (1 Hz) = A warning occurs • Solid red = A failure occurs |
|  | System Status LED | <ul style="list-style-type: none"> • Off = Normal • Flashing red (1 Hz) = A warning occurs • Solid red = A failure occurs |

| Icon | LED & Button | Description |
|--|---------------------|--|
|  | Power Status LED | <ul style="list-style-type: none"> Off = Normal Flashing red (1 Hz) = A warning occurs Solid red = A failure occurs |
|  | System Overheat LED | <ul style="list-style-type: none"> Off = Normal Flashing red (1 Hz) = A warning occurs Solid red = A failure occurs |
|  | Fan Status LED | <ul style="list-style-type: none"> Off = Normal Flashing red (1 Hz) = A warning occurs Solid red = A failure occurs |
|  | Network Status LED | <ul style="list-style-type: none"> Off = No network connection or abnormal Flashing green = Data being transmitted <p>Note: It only indicates the working status of LOM.</p> |


5.1.3 Ports

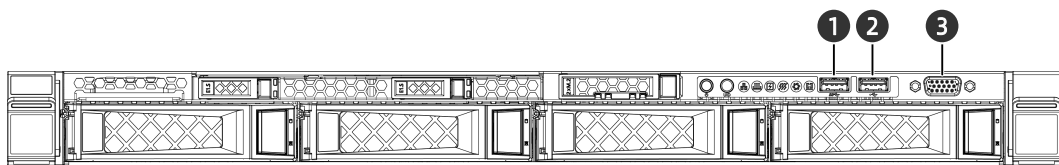Figure 5-15 Front Panel Ports of 4 × 3.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration




| Item | Feature | Item | Feature |
|------|--------------|------|------------------|
| 1 | USB 3.0 Port | 2 | USB 2.0/LCD Port |
| 3 | VGA Port | | |

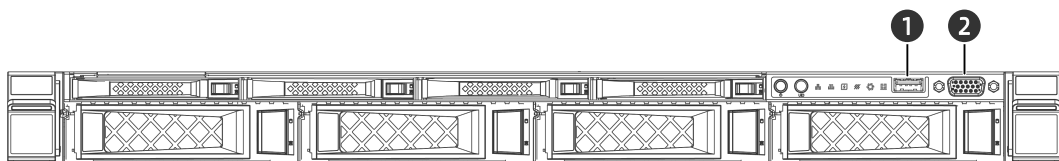Figure 5-16 Front Panel Ports of 4 × 3.5-inch Drive + 4 × 2.5-inch Drive Configuration




| Item | Feature | Item | Feature |
|------|--------------|------|----------|
| 1 | USB 3.0 Port | 2 | VGA Port |

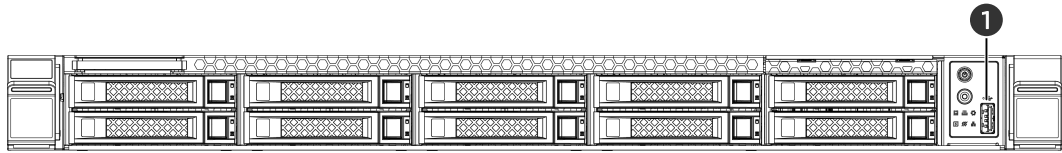Figure 5-17 Front Panel Ports of 10 × 2.5-inch Drive Configuration




| Item | Feature | Item | Feature |
|------|------------------|------|---------|
| 1 | USB 2.0/LCD Port | | |

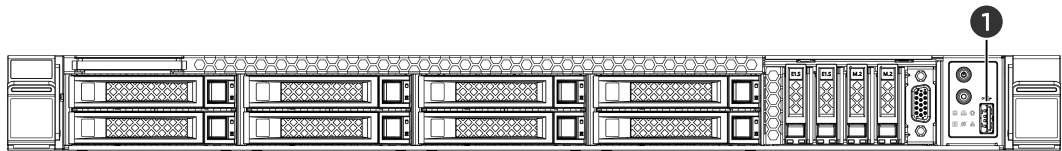Figure 5-18 Front Panel Ports of 8 × 2.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration



| Item | Feature | Item | Feature |
|------|------------------|------|---------|
| 1 | USB 2.0/LCD Port | | |

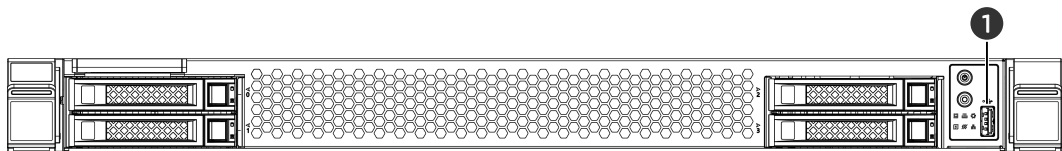Figure 5-19 Front Panel Ports of EVAC Heatsink Configuration



| Item | Feature | Item | Feature |
|------|------------------|------|---------|
| 1 | USB 2.0/LCD Port | | |

1. Port Description

Table 5-2 Front Panel Port Description


| Feature | Type | Quantity | Description |
|----------|------|----------|---|
| VGA Port | DB15 | 1 | Enables you to connect a display terminal, for example, a monitor or KVM to the system. |

| Feature | Type | Quantity | Description |
|------------------|---------|----------|---|
| USB 3.0 Port | USB 3.0 | 1 | Enables you to connect a USB 3.0 device to the system. Note: <ul style="list-style-type: none"> Make sure the USB device is in good condition or it may cause the server to work abnormally. |
| USB 2.0/LCD Port | USB 2.0 | 1 | <ul style="list-style-type: none"> The USB 2.0 port enables you to connect a USB 2.0 device to the system. Note: <ul style="list-style-type: none"> Make sure the USB device is in good condition or it may cause the server to work abnormally. The LCD port enables you to connect an Inspur exclusive LCD module to the system |

5.2 Rear Panel


5.2.1 Appearance

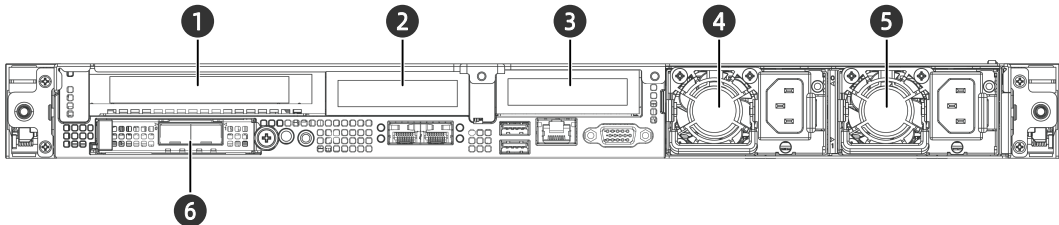Figure 5-20 Rear View 1




| Item | Feature | Item | Feature |
|------|-------------|------|--|
| 1 | PCIe Slot 0 | 2 | PCIe Slot 1 |
| 3 | PCIe Slot 2 | 4 | PSU0 |
| 5 | PSU1 | 6 | OCP 3.0 Slot Note: Supports an OCP 3.0 card. |

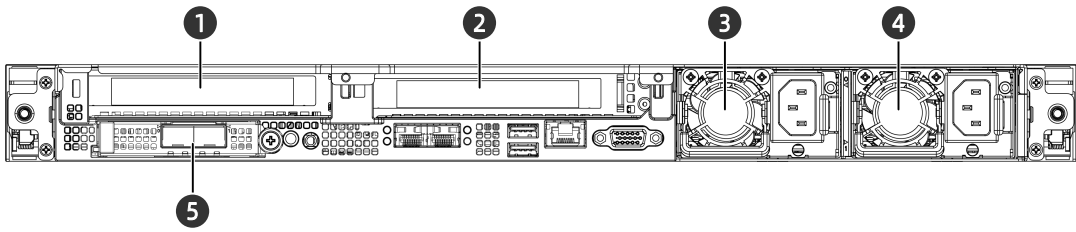Figure 5-21 Rear View 2



| Item | Feature | Item | Feature |
|------|--|------|-------------|
| 1 | PCIe Slot 0 | 2 | PCIe Slot 1 |
| 3 | PSU0 | 4 | PSU1 |
| 5 | OCP 3.0 Slot Note: Supports an OCP 3.0 card. | | |

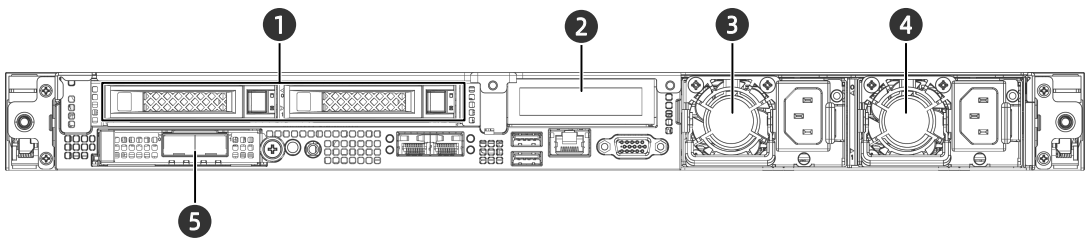
Figure 5-22 Rear View 3



| Item | Feature | Item | Feature |
|------|--|------|-------------|
| 1 | 2.5-inch Drive Bay × 2 | 2 | PCIe Slot 2 |
| 3 | PSU0 | 4 | PSU1 |
| 5 | OCP 3.0 Slot Note: Supports an OCP 3.0 card. | | |

5.2.2 LEDs and Buttons

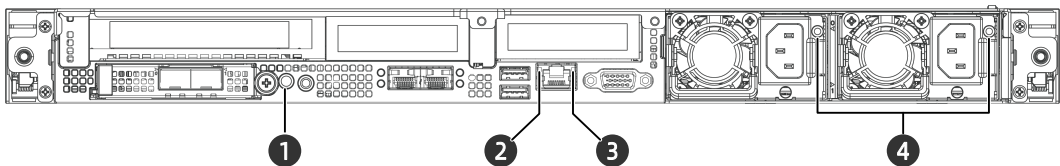
Figure 5-23 Rear Panel LEDs and Buttons 1



| Item | Feature | Item | Feature |
|------|----------------------------|------|--|
| 1 | UID/BMC RST Button and LED | 2 | Management Network Port Link Speed LED |


| Item | Feature | Item | Feature |
|------|---|------|----------|
| 3 | Management Network Port Link Activity LED | 4 | PSU LEDs |

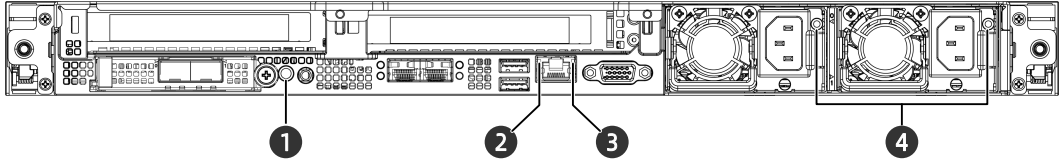Figure 5-24 Rear Panel LEDs and Buttons 2



| Item | Feature | Item | Feature |
|------|---|------|--|
| 1 | UID/BMC RST Button and LED | 2 | Management Network Port Link Speed LED |
| 3 | Management Network Port Link Activity LED | 4 | PSU LEDs |

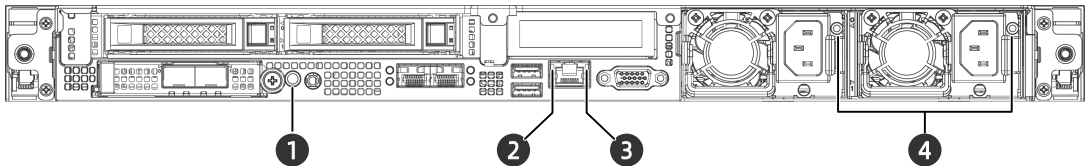Figure 5-25 Rear Panel LEDs and Buttons 3




| Item | Feature | Item | Feature |
|------|---|------|--|
| 1 | UID/BMC RST Button and LED | 2 | Management Network Port Link Speed LED |
| 3 | Management Network Port Link Activity LED | 4 | PSU LEDs |

5.2.3 Ports


1. Port Location

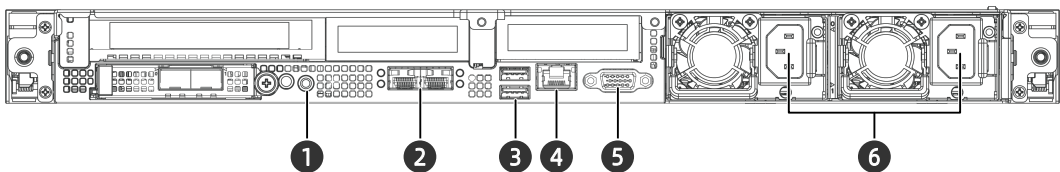Figure 5-26 Rear Panel Ports 1




| Item | Feature | Item | Feature |
|------|------------------------|------|-----------------------------|
| 1 | System/BMC Serial Port | 2 | Onboard Network Port |
| 3 | USB 3.0 Port | 4 | BMC Management Network Port |
| 5 | VGA Port | 6 | PSU Sockets |

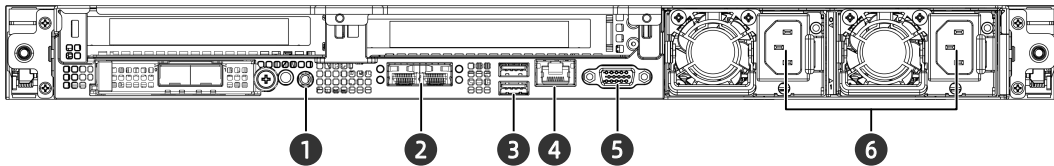Figure 5-27 Rear Panel Ports 2



| Item | Feature | Item | Feature |
|------|------------------------|------|-----------------------------|
| 1 | System/BMC Serial Port | 2 | Onboard Network Port |
| 3 | USB 3.0 Port | 4 | BMC Management Network Port |
| 5 | VGA Port | 6 | PSU Sockets |

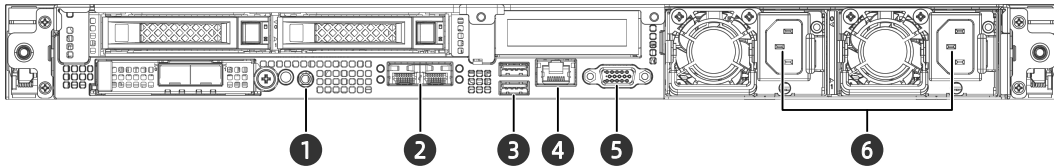Figure 5-28 Rear Panel Ports 3



| Item | Feature | Item | Feature |
|------|------------------------|------|-----------------------------|
| 1 | System/BMC Serial Port | 2 | Onboard Network Port |
| 3 | USB 3.0 Port | 4 | BMC Management Network Port |
| 5 | VGA Port | 6 | PSU Sockets |

2. Port Description

Table 5-3 Rear Panel Port Description


| Feature | Type | Quantity | Description |
|-----------------|-----------------------|----------|---|
| BMC Serial Port | 3.5 mm headphone jack | 1 | Enables you to capture the BMC logs and debug the BMC. Note: |

| Feature | Type | Quantity | Description |
|-----------------------------|-----------------------|----------|---|
| | | | The serial port uses a standard 3.5 mm jack with a default baud rate of 115,200 bit/s. |
| System Serial Port | 3.5 mm headphone jack | 1 | Enables you to capture the system logs Note: The serial port uses a standard 3.5 mm jack with a default baud rate of 115,200 bit/s. |
| USB 3.0 Port | USB 3.0 | 2 | Enables you to connect a USB 3.0 device to the system. Note: <ul style="list-style-type: none"> The maximum current supported by the USB port is 0.9 A. Make sure the USB device is in good condition or it may cause the server to work abnormally. |
| BMC Management Network Port | RJ45 | 1 | Enables you to manage the server. Note: The port is a Gigabit Ethernet port of 100/1,000 Mb supporting self-negotiation. |
| VGA Port | DB15 | 1 | Enables you to connect a display terminal, for example, a monitor or KVM to the system. |
| PSU Socket | - | 2 | Connected through a power cord. User can select the PSUs as needed. Note: Make sure that the rated power of every PSU is greater than the rated power of the server. |

5.3 Processors

- Supports up to 2 processors.
- When configuring only 1 processor, CPU0 socket should be preferred.
- Two processors used in the server must be of same model.
- For specific system processor options, consult your local Inspur sales representative or refer to [7.2 Hardware Compatibility](#).

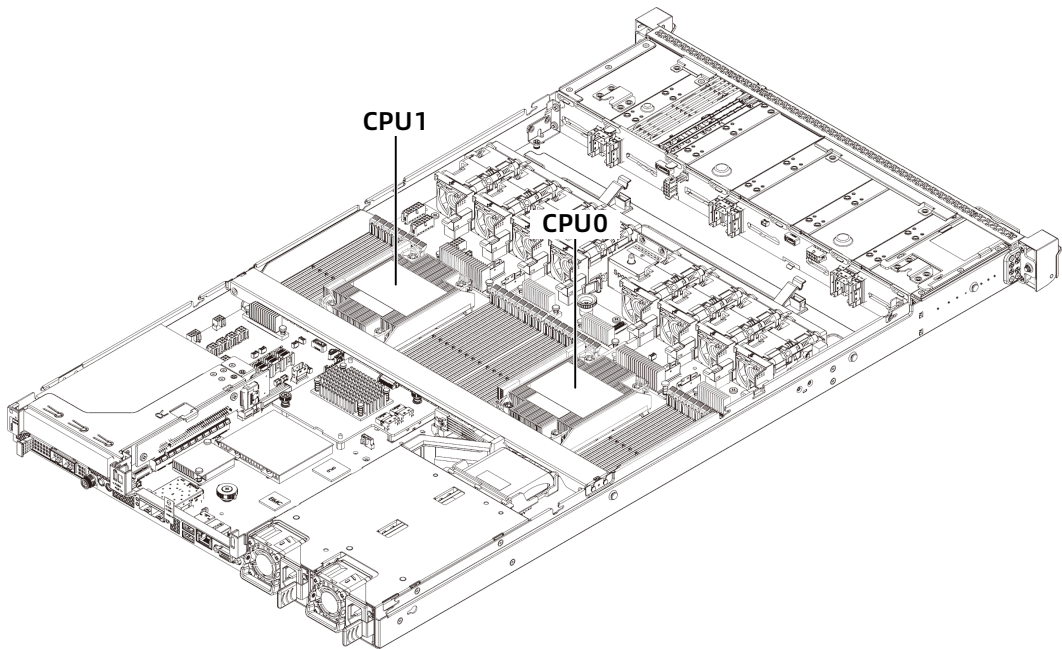Figure 5-29 Processor Layout




5.4 Memory

5.4.1 DDR4 DIMMs

1. Identification

To determine DIMM characteristics, refer to the label attached to the DIMM and the following figure and table.

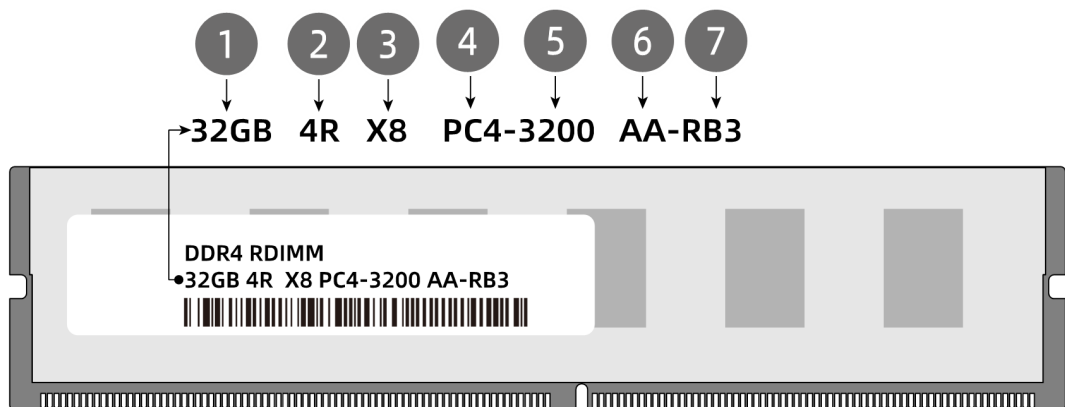Figure 5-30 DIMM Identification



| Item | Description | Example |
|------|-------------|--|
| 1 | Capacity | <ul style="list-style-type: none"> • 16 GB • 32 GB |

| Item | Description | Example |
|------|----------------------|---|
| | | <ul style="list-style-type: none"> • 64 GB • 128 GB • 256 GB |
| 2 | Rank(s) | <ul style="list-style-type: none"> • 1R = Single rank • 2R = Dual rank • 2S2R = Two ranks of two high stacked 3DS DRAM • 4DR = Four ranks of dual die packaged DRAM • 4R = Quad rank • 8R = Octal rank |
| 3 | Data width of DRAM | <ul style="list-style-type: none"> • x4 = 4 bits • x8 = 8 bits |
| 4 | DIMM slot type | PC4 = DDR4 |
| 5 | Maximum memory speed | <ul style="list-style-type: none"> • 2,933 MT/s • 3,200 MT/s |
| 6 | CAS latency | SDP-chip-based <ul style="list-style-type: none"> • V = CAS-19-19-19 • Y = CAS-21-21-21 • AA = CAS-22-22-22 3DS-chip-based <ul style="list-style-type: none"> • V = CAS-22-19-19 • Y = CAS-24-21-21 • AA = CAS-26-22-22 |
| 7 | DIMM type | <ul style="list-style-type: none"> • R = RDIMM • L = LRDIMM |

2. Memory Subsystem Architecture

The NF5180M6 supports 32 DIMM slots and each processor supports 8 memory channels.

Within a channel, populate the DIMM slot with its silk screen ending with D0 first and second the DIMM slot with its silk screen ending with D1. For instance, within CPU0 Channel 0, populate CPU0_C0D0 first and second CPU0_C0D1.

Table 5-4 DIMM Slot List

| CPU | Channel ID | Silk Screen |
|------|------------|-------------|
| CPU0 | Channel 0 | CPU0_C0D0 |
| | | CPU0_C0D1 |
| | Channel 1 | CPU0_C1D0 |
| | | CPU0_C1D1 |
| | Channel 2 | CPU0_C2D0 |
| | | CPU0_C2D1 |
| | Channel 3 | CPU0_C3D0 |
| | | CPU0_C3D1 |
| | Channel 4 | CPU0_C4D0 |
| | | CPU0_C4D1 |
| | Channel 5 | CPU0_C5D0 |
| | | CPU0_C5D1 |
| | Channel 6 | CPU0_C6D0 |
| | | CPU0_C6D1 |
| | Channel 7 | CPU0_C7D0 |
| | | CPU0_C7D1 |
| CPU1 | Channel 0 | CPU1_C0D0 |
| | | CPU1_C0D1 |
| | Channel 1 | CPU1_C1D0 |
| | | CPU1_C1D1 |
| | Channel 2 | CPU1_C2D0 |
| | | CPU1_C2D1 |
| | Channel 3 | CPU1_C3D0 |
| | | CPU1_C3D1 |
| | Channel 4 | CPU1_C4D0 |
| | | CPU1_C4D1 |
| | Channel 5 | CPU1_C5D0 |
| | | CPU1_C5D1 |
| | Channel 6 | CPU1_C6D0 |
| | | CPU1_C6D1 |
| | Channel 7 | CPU1_C7D0 |
| | | CPU1_C7D1 |

3. Compatibility

Refer to the following rules to select the DDR4 DIMMs.

 IMPORTANT

- A server must use DDR4 DIMMs with the same part number (P/N code). All DDR4 DIMMs operate at the same speed, which is the lowest of:
 - Memory speed supported by a specific CPU.
 - Maximum operating speed of a specific memory configuration.
 - Mixing DDR4 DIMM types (RDIMM, LRDIMM) or mixing DDR4 DIMM specifications (capacity, bit width, rank, height, etc.) is not supported.
 - For specific system memory options, consult your local Inspur sales representative or refer to [7.2 Hardware Compatibility](#).
-

- DDR4 DIMMs can be used with 3rd Gen Intel Xeon Scalable processors (Ice Lake). The maximum memory capacity supported is identical for different CPU models.
 - The total memory capacity is the sum of the capacity of all DDR4 DIMMs of all the CPUs.
-

 IMPORTANT

The number of ranks (up to 4 ranks for an RDIMM and up to 8 ranks for an LRDIMM) supported per channel restricts the maximum number of DIMMs supported per channel as follows: Maximum number of DIMMs supported per channel \leq Maximum number of ranks supported per channel/Number of ranks per DIMM.

- For an LRDIMM, more than 8 ranks are supported.
-

 NOTE

One quad-rank LRDIMM provides the same electrical load on a memory bus as a single-rank RDIMM.

Table 5-5 DDR4 DIMM Specifications

| Item | | Value | | | |
|---|-------------------|-------|-------|-------|-------|
| Capacity per DDR4 DIMM (GB) | | 16 | 32 | 64 | 128 |
| Type | | RDIMM | RDIMM | RDIMM | RDIMM |
| Rated speed (MT/s) | | 3,200 | 3,200 | 3,200 | 3,200 |
| Operating voltage (V) | | 1.2 | 1.2 | 1.2 | 1.2 |
| Maximum number of DDR4 DIMMs supported in a server ^a | | 32 | 32 | 32 | 32 |
| Maximum capacity of DDR4 DIMMs supported in a server (GB) ^b | | 512 | 1,024 | 2,048 | 4,096 |
| Actual speed (MT/s) | 1DPC ^c | 3,200 | 3,200 | 3,200 | 3,200 |
| | 2DPC | 3,200 | 3,200 | 3,200 | 3,200 |
| <p>a: The maximum number of DDR4 DIMMs supported is based on 2 processors. If the 1-processor configuration is selected, the number should be halved.</p> <p>b: It indicates the maximum memory capacity supported when all the DIMM slots are populated with DDR4 DIMMs.</p> <p>c: DIMM Per Channel (DPC) is the number of DIMMs per memory channel.</p> <p>The information above is for reference only, consult your local Inspur sales representative for details.</p> | | | | | |

4. Population Rules



This section describes the DIMM population rules when only DDR4 DIMMs are installed in a server. If mixing DDR4 DIMMs and PMems is required, refer to [5.4.2.4 PMem Population Rules](#).

General population rules for DDR4 DIMMs:

- Install DIMMs only when the corresponding processor has been installed.
- Mixing LRDIMMs and RDIMMs is not allowed.
- Install dummies in empty DIMM slots.

Population rules for DDR4 DIMMs in specific modes:

- Memory sparing
 - Follow the general population rules.
 - Each channel must have a valid online spare configuration.
 - Each channel can have a different online spare configuration.

- Each channel with a DIMM installed must have a spare rank.
- Memory mirroring
 - Follow the general population rules.
 - Each processor supports 2 integrated memory controllers (IMCs) and each IMC has two channels to be populated with DIMMs. Installed DIMMs must be of the same capacity and organization.
 - In a multi-processor configuration, each processor must have a valid memory mirroring configuration.
- Memory demand scrubbing/patrol scrubbing
 - Follow the general DIMM population rules.

5. DIMM Slot Layout

Up to 32 DDR4 DIMMs can be installed in the server, and a balanced DIMM configuration is recommended for optimal memory performance. DIMM configuration must be compliant with the DIMM population rules.



At least one DDR4 DIMM must be installed in the DIMM slot(s) corresponding to each CPU.

Figure 5-31 DIMM Slot Layout

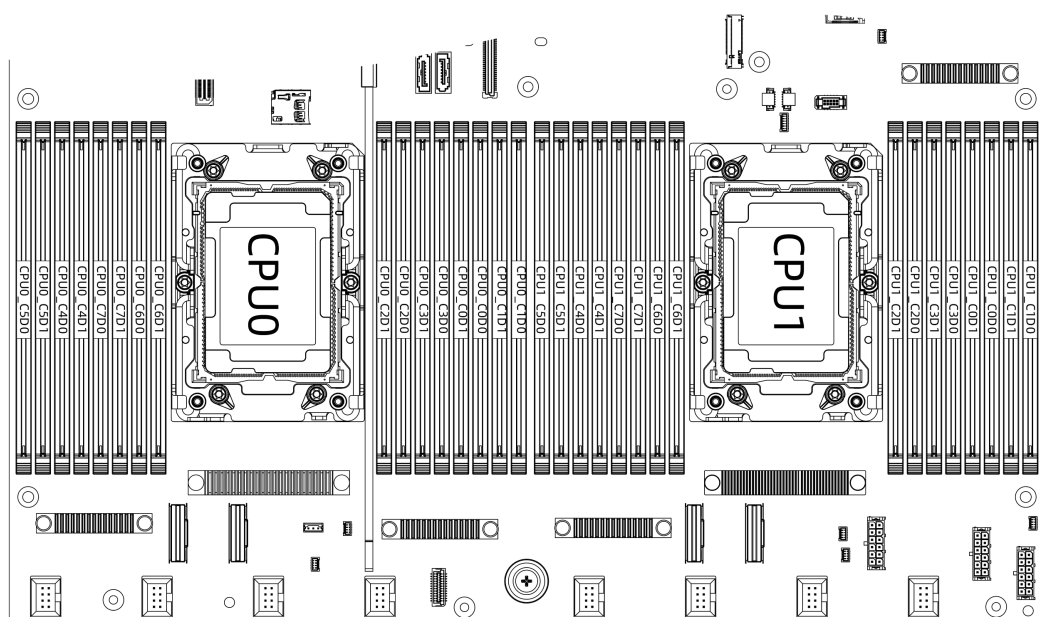


Table 5-6 DDR4 DIMM Population Rules (1-Processor Configuration)

| Processor | Channel ID | Memory Slot | DIMM Quantity | | | | | | | | | | | | | | | |
|-----------|------------|-------------|---------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|
| | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| CPU0 | Channel 0 | CPU0_C0D0 | ● | ● | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C0D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 1 | CPU0_C1D0 | | | | | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C1D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 2 | CPU0_C2D0 | | | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C2D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 3 | CPU0_C3D0 | | | | | | | | ● | | | | | | | | ● |
| | | CPU0_C3D1 | | | | | | | | | | | | | | | | ● |
| | Channel 4 | CPU0_C4D0 | | ● | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C4D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 5 | CPU0_C5D0 | | | | | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C5D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 6 | CPU0_C6D0 | | | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C6D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 7 | CPU0_C7D0 | | | | | | | | ● | | | | | | | | ● |
| | | CPU0_C7D1 | | | | | | | | | | | | | | | | ● |

Table 5-7 DDR4 DIMM Population Rules (2-Processor Configuration)

| Processor | Channel ID | Memory Slot | DIMM Quantity | | | | | | | | | | | | | | | |
|-----------|------------|-------------|---------------|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|
| | | | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 |
| CPU0 | Channel 0 | CPU0_C0D0 | ● | ● | | ● | | ● | | ● | | ● | | ● | | ● | | ● |
| | | CPU0_C0D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 1 | CPU0_C1D0 | | | | | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C1D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 2 | CPU0_C2D0 | | | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C2D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 3 | CPU0_C3D0 | | | | | | | | | ● | | | | | | | ● |
| | | CPU0_C3D1 | | | | | | | | | | | | | | | | ● |
| | Channel 4 | CPU0_C4D0 | | ● | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C4D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 5 | CPU0_C5D0 | | | | | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C5D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 6 | CPU0_C6D0 | | | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU0_C6D1 | | | | | | | | | | | | ● | | | | ● |
| Channel 7 | CPU0_C7D0 | | | | | | | | | ● | | | | | | | ● | |
| | CPU0_C7D1 | | | | | | | | | | | | | | | | ● | |
| CPU1 | Channel 0 | CPU1_C0D0 | ● | ● | | ● | | ● | | ● | | ● | | ● | | ● | | ● |
| | | CPU1_C0D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 1 | CPU1_C1D0 | | | | | | ● | | ● | | | | ● | | | | ● |
| | | CPU1_C1D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 2 | CPU1_C2D0 | | | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU1_C2D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 3 | CPU1_C3D0 | | | | | | | | | ● | | | | | | | ● |
| | | CPU1_C3D1 | | | | | | | | | | | | | | | | ● |
| | Channel 4 | CPU1_C4D0 | | ● | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU1_C4D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 5 | CPU1_C5D0 | | | | | | ● | | ● | | | | ● | | | | ● |
| | | CPU1_C5D1 | | | | | | | | | | | | ● | | | | ● |
| | Channel 6 | CPU1_C6D0 | | | | ● | | ● | | ● | | | | ● | | | | ● |
| | | CPU1_C6D1 | | | | | | | | | | | | ● | | | | ● |
| Channel 7 | CPU1_C7D0 | | | | | | | | | ● | | | | | | | ● | |
| | CPU1_C7D1 | | | | | | | | | | | | | | | | ● | |

6. Memory Protection Technology

DDR4 DIMMs support the following memory protection technologies:


- ECC (Error Correcting Code)
- Memory mirroring
- Memory rank sparing
- SDDC (Single Device Data Correction)
- ADDDC (Adaptive Double- Device Data Correction)

- Power up-Post Package Repair (PPR)

5.4.2 PMems

1. Identification

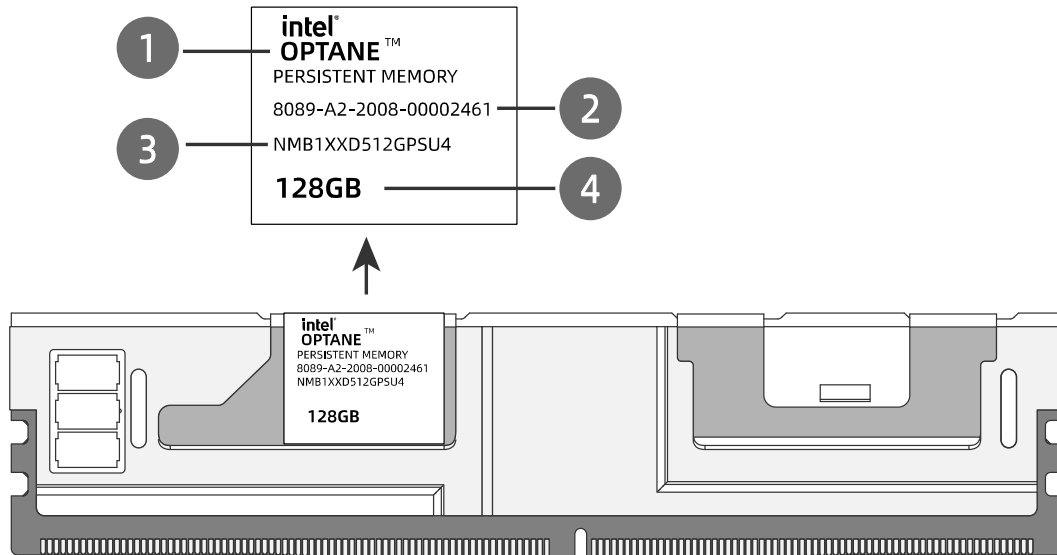Figure 5-32 PMem Identification



| Item | Description | Example |
|------|----------------|--------------------------------|
| 1 | Component name | Intel Optane Persistent Memory |
| 2 | Serial number | 8089-A2-2008-00002461 |
| 3 | Model | NMB1XXD512GPSU4 |
| 4 | Capacity | 128 GB |

2. Memory Subsystem Architecture

The NF5180M6 supports 32 DIMM slots and 8 channels per CPU with 2 DIMM slots per channel. Only one PMem can be populated in each channel.

PMems must be used with DDR4 DIMMs.

Table 5-8 DIMM Slot List

| CPU | Channel ID | Silk Screen |
|------|------------|-------------|
| CPU0 | Channel 0 | CPU0_C0D0 |
| | | CPU0_C0D1 |
| | Channel 1 | CPU0_C1D0 |
| | | CPU0_C1D1 |
| | Channel 2 | CPU0_C2D0 |
| | | CPU0_C2D1 |

| CPU | Channel ID | Silk Screen | |
|-----------|------------|-------------|-----------|
| | Channel 3 | CPU0_C3D0 | |
| | | CPU0_C3D1 | |
| | Channel 4 | CPU0_C4D0 | |
| | | CPU0_C4D1 | |
| | Channel 5 | CPU0_C5D0 | |
| | | CPU0_C5D1 | |
| | Channel 6 | CPU0_C6D0 | |
| | | CPU0_C6D1 | |
| | Channel 7 | CPU0_C7D0 | |
| | | CPU0_C7D1 | |
| | CPU1 | Channel 0 | CPU1_C0D0 |
| | | | CPU1_C0D1 |
| | | Channel 1 | CPU1_C1D0 |
| | | | CPU1_C1D1 |
| Channel 2 | | CPU1_C2D0 | |
| | | CPU1_C2D1 | |
| Channel 3 | | CPU1_C3D0 | |
| | | CPU1_C3D1 | |
| Channel 4 | | CPU1_C4D0 | |
| | | CPU1_C4D1 | |
| Channel 5 | | CPU1_C5D0 | |
| | | CPU1_C5D1 | |
| Channel 6 | | CPU1_C6D0 | |
| | | CPU1_C6D1 | |
| Channel 7 | CPU1_C7D0 | | |
| | CPU1_C7D1 | | |

3. Compatibility

Refer to the following rules to configure PMems:

 IMPORTANT

- PMems must be used with DDR4 DIMMs.
- For specific system PMem options, consult Inspur Customer Service.
- PMems must be used with the 3rd Gen Intel Xeon Scalable processors (Ice Lake). The maximum memory capacity supported is identical for all CPU models.
- PMems can only be configured into two modes: App Direct Mode (AD) and Memory Mode (MM), and the calculation formula for the total memory

capacity is as follows:

- AD: Total memory capacity = sum of all PMem capacities + sum of DDR4 DIMM capacities.
- MM: Total memory capacity = sum of all PMem capacities (DDR4 DIMMs operate as cache only and do not count toward the total memory capacity)
- For detailed information on the specific capacity type for a single PMem module, consult Inspur Customer Service.
- The maximum number of memory supported depends on the memory type and rank quantity.

Table 5-9 PMem Specifications

| Item | Value | | |
|--|-------|-------|-------|
| Capacity per PMem (GB) | 128 | 256 | 512 |
| Rated speed (MT/s) | 3,200 | 3,200 | 3,200 |
| Operating voltage (V) | 1.2 | 1.2 | 1.2 |
| Maximum number of PMems supported in a server ^a | 16 | 16 | 16 |
| Maximum capacity of PMems supported in a server (GB) ^b | 2,048 | 4,096 | 8,192 |
| Actual speed (MT/s) | 3,200 | 3,200 | 3,200 |
| <p>a: The maximum number of PMems supported is based on 2 processors. If the server is 1-processor configuration, the number should be halved.</p> <p>b: The maximum capacity of PMem supported varies with the operating modes of PMem.</p> <p>The above information is for reference only, consult your local Inspur sales representative for details.</p> | | | |

4. PMem Population Rules

- General population rules for PMems:
 - DDR4 DIMM types used with PMems include RDIMMs and LRDIMMs.
 - A server must use PMems with the same part number (P/N code).
 - In a server, DDR4 DIMMs used with PMems must have the same part number (P/N code).
- Population rules for PMems in specific modes:

- AD: In a server, the recommended capacity ratio of DDR4 DIMMs to PMems is between 1:1 and 1:8.
- MM: In a server, the recommended capacity ratio of DDR4 DIMMs to PMems is between 1:4 and 1:16.

5. DIMM Slot Layout

Up to 16 PMems can be installed in the server, and PMems must be used with DDR4 DIMMs. PMem configuration must be compliant with the PMem population rules. Consult Inspur Customer Service for details.

Figure 5-33 DIMM Slot Layout

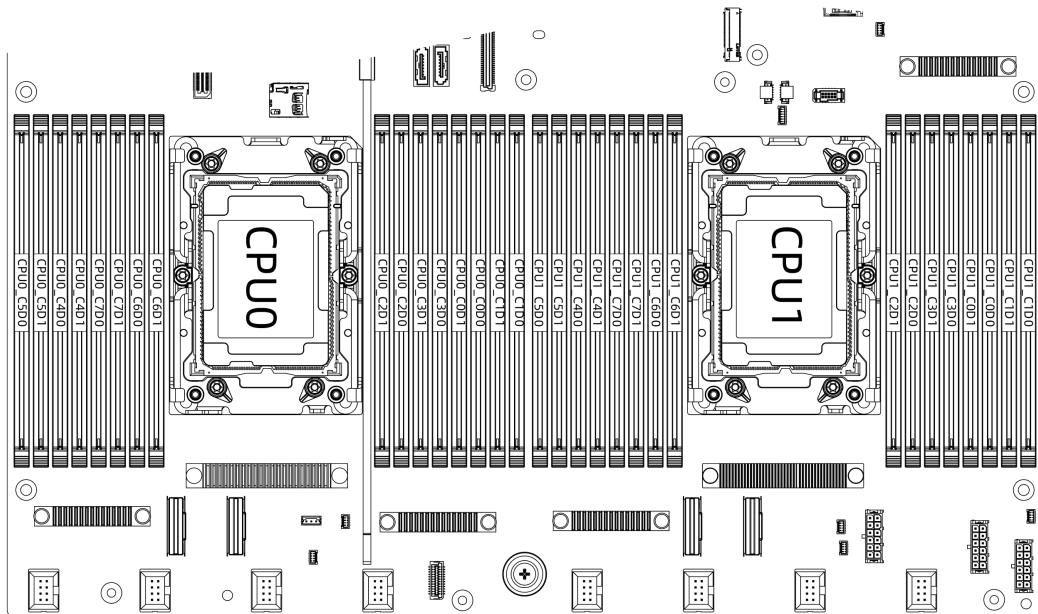


Table 5-10 PMem Population Rules (1-Processor Configuration)

| Processor | Channel ID | Memory Slot | Population Rules | | | | | | | | |
|-----------|------------|-------------|---------------------|-----|----|-----|----|-----|----|------|----|
| | | | ●: DDR4 DIMM ○:PMem | | | | | | | | |
| | | | AD | MM | AD | AD | AD | MM | AD | MM | AD |
| 4+4 | | 6+1 | | 8+1 | | 8+4 | | 8+8 | | 12+2 | |
| CPU0 | Channel 0 | CPU0_C0D0 | ● | | ● | ● | ● | ● | ● | ● | ● |
| | | CPU0_C0D1 | | | | ○ | ○ | ○ | | | ● |
| | Channel 1 | CPU0_C1D0 | ○ | | ● | ● | ● | ● | ● | ● | ○ |
| | | CPU0_C1D1 | | | | | | | ○ | | |
| | Channel 2 | CPU0_C2D0 | ● | | ● | ● | ● | ● | ● | ● | ● |
| | | CPU0_C2D1 | | | | | | ○ | ○ | | ● |
| | Channel 3 | CPU0_C3D0 | ○ | | ○ | ● | ● | ● | ● | ● | ● |
| | | CPU0_C3D1 | | | | | | | ○ | | ● |
| | Channel 4 | CPU0_C4D0 | ● | | ● | ● | ● | ● | ● | ● | ● |
| | | CPU0_C4D1 | | | | | | ○ | ○ | | ● |
| | Channel 5 | CPU0_C5D0 | ○ | | ● | ● | ● | ● | ● | ● | ○ |
| | | CPU0_C5D1 | | | | | | | ○ | | |
| | Channel 6 | CPU0_C6D0 | ● | | ● | ● | ● | ● | ● | ● | ● |
| | | CPU0_C6D1 | | | | | | ○ | ○ | | ● |
| | Channel 7 | CPU0_C7D0 | ○ | | | ● | ● | ● | ● | ● | ● |
| | | CPU0_C7D1 | | | | | | | ○ | | ● |

Table 5-11 PMem Population Rules (2-Processor Configuration)

| Processor | Channel ID | Memory Slot | Population Rules | | | | | | | | | |
|-----------|------------|-------------|---------------------|------|----|------|----|-------|----|------|----|--|
| | | | ●: DDR4 DIMM ○:PMem | | | | | | | | | |
| | | | AD | MM | AD | AD | AD | MM | AD | MM | AD | |
| 8+8 | | 12+2 | | 16+2 | | 16+8 | | 16+16 | | 24+4 | | |
| CPU0 | Channel 0 | CPU0_C0D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU0_C0D1 | | | | | ○ | | ○ | | ○ | |
| | Channel 1 | CPU0_C1D0 | ○ | | ● | | ● | | ● | | ● | |
| | | CPU0_C1D1 | | | | | | | | | ○ | |
| | Channel 2 | CPU0_C2D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU0_C2D1 | | | | | | | ○ | | ○ | |
| | Channel 3 | CPU0_C3D0 | ○ | | ○ | | ● | | ● | | ● | |
| | | CPU0_C3D1 | | | | | | | | | ○ | |
| | Channel 4 | CPU0_C4D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU0_C4D1 | | | | | | | ○ | | ○ | |
| | Channel 5 | CPU0_C5D0 | ○ | | ● | | ● | | ● | | ● | |
| | | CPU0_C5D1 | | | | | | | | | ○ | |
| | Channel 6 | CPU0_C6D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU0_C6D1 | | | | | | | ○ | | ○ | |
| Channel 7 | CPU0_C7D0 | ○ | | ○ | | ● | | ● | | ● | | |
| | CPU0_C7D1 | | | | | | | | | ○ | | |
| CPU1 | Channel 0 | CPU1_C0D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU1_C0D1 | | | | | ○ | | ○ | | ○ | |
| | Channel 1 | CPU1_C1D0 | ○ | | ● | | ● | | ● | | ● | |
| | | CPU1_C1D1 | | | | | | | | | ○ | |
| | Channel 2 | CPU1_C2D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU1_C2D1 | | | | | | | ○ | | ○ | |
| | Channel 3 | CPU1_C3D0 | ○ | | ○ | | ● | | ● | | ● | |
| | | CPU1_C3D1 | | | | | | | | | ○ | |
| | Channel 4 | CPU1_C4D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU1_C4D1 | | | | | | | ○ | | ○ | |
| | Channel 5 | CPU1_C5D0 | ○ | | ● | | ● | | ● | | ● | |
| | | CPU1_C5D1 | | | | | | | | | ○ | |
| | Channel 6 | CPU1_C6D0 | ● | | ● | | ● | | ● | | ● | |
| | | CPU1_C6D1 | | | | | | | ○ | | ○ | |
| Channel 7 | CPU1_C7D0 | ○ | | ○ | | ● | | ● | | ● | | |
| | CPU1_C7D1 | | | | | | | | | ○ | | |

6. Memory Protection Technology

PMems support the following memory protection technologies:

- PMem module Error Detection and Correction
- PMem module Device Failure Recovery - SDDC
- PMem module Package Sparing - DDDC
- PMem module Patrol Scrubbing

- PMem module Address Error Detection
- PMem module Data Poisoning - Corrupt Data Containment
- PMem module Viral
- PMem module Address Range Scrub (ARS)
- PMem module Error Injection
- DDR-T Command and Address Parity Check and Retry
- DDR-T Read Write Data ECC Check and Retry
- PMem module Faulty DIMM Isolation
- PMem module Error Reporting

5.5 Storage

5.5.1 Drive Configurations

Table 5-12 Drive Configurations

| Configuration | Front Drive | Rear Drive | Internal Drive | Drive Management |
|---|---|-----------------------------|-----------------------------------|--|
| 2 × E1.S + 2 × SATA M.2 + 4 × 3.5-inch SAS/SATA Drive | 2 × E1.S in drive bays 0-1, 2 × SATA M.2 in drive bays 2-3, and 4 × 3.5-inch SAS/SATA drive in drive bays 4-7 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> • SAS/SATA drive: SAS/RAID controller card/PCH • E1.S: directly connected to CPU • Internal M.2: directly connected to CPU |
| 2 × E1.S + 2 × SATA M.2 + 4 × 2.5-inch NVMe Drive | 2 × E1.S in drive bays 0-1, 2 × SATA M.2 in drive bays 2-3, and 4 × 2.5-inch NVMe drive in drive bays 4-7 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> • SAS/SATA drive: SAS/RAID controller card/PCH |


| Configuration | Front Drive | Rear Drive | Internal Drive | Drive Management |
|---|---|-----------------------------|-----------------------------------|---|
| | | | | <ul style="list-style-type: none"> • E1.S: directly connected to CPU • NVMe drive: directly connected to CPU • Internal M.2: directly connected to CPU |
| 10 × 2.5-inch SAS/SATA Drive | 10 × 2.5-inch SAS/SATA drive in drive bays 0-9 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> • SAS/SATA drive: SAS/RAID controller card/PCH • Internal M.2: directly connected to CPU |
| 10 × 2.5-inch NVMe Drive | 10 × 2.5-inch NVMe drive in drive bays 0-9 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> • NVMe drive: directly connected to CPU • Internal M.2: directly connected to CPU |
| 2 × E1.S + 2 × SATA M.2 + 8 × 2.5-inch SAS/SATA Drive | 8 × 2.5-inch SAS/SATA drive in drive bays 0-7, 2 × E1.S in drive bays 8-9, and 2 × SATA M.2 in drive bays 10-11 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> • SAS/SATA drive: SAS/RAID controller card/PCH • E1.S: directly connected to CPU |

| Configuration | Front Drive | Rear Drive | Internal Drive | Drive Management |
|---|---|-----------------------------|-----------------------------------|---|
| | | | | <ul style="list-style-type: none"> Internal M.2: directly connected to CPU |
| 2 × E1.S + 2 × SATA M.2 + 8 × 2.5-inch NVMe Drive | 8 × 2.5-inch NVMe drive in drive bays 0-7, 2 × E1.S in drive bays 8-9, and 2 × SATA M.2 in drive bays 10-11 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> SAS/SATA drive: SAS/RAID controller card/PCH E1.S: directly connected to CPU NVMe drive: directly connected to CPU Internal M.2: directly connected to CPU |
| 12 × 2.5-inch SAS/SATA Drive | 12 × 2.5-inch SAS/SATA drive in drive bays 0-11 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> SAS/SATA drive: SAS/RAID controller card/PCH Internal M.2: directly connected to CPU |
| 12 × 2.5-inch NVMe Drive | 12 × 2.5-inch NVMe drive in drive bays 0-11 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> NVMe drive: directly connected to CPU Internal M.2: directly |

| Configuration | Front Drive | Rear Drive | Internal Drive | Drive Management |
|------------------------------------|---|-----------------------------|-----------------------------------|---|
| | | | | connected to CPU |
| 32 × E1.S SSD | 32 × E1.S in drive bays 0-31 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> E1.S: connected to CPU via PCIe switch |
| EVAC + 4 × 2.5-inch SAS/SATA Drive | 4 × 2.5-inch SAS/SATA drive in drive bays 0-4 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> SAS/SATA drive: SAS/RAID controller card/PCH Internal M.2: directly connected to CPU |
| EVAC + 4 × 2.5-inch NVMe Drive | 4 × 2.5-inch NVMe drive in drive bays 0-3 | 2 × 2.5-inch SAS/SATA drive | NVMe M.2 drives on an M.2 adapter | <ul style="list-style-type: none"> NVMe drive: directly connected to CPU Internal M.2: directly connected to CPU |

5.5.2 Drive Numbering


Figure 5-34 4 × 3.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration



| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card (3.5-inch drives connected to a RAID controller card) |
|--------------------|-------------------------------|--|
| 0 | 0 | - |
| 1 | 1 | - |


| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card (3.5-inch drives connected to a RAID controller card) |
|--------------------|-------------------------------|--|
| 2 | 2 | - |
| 3 | 3 | - |
| 4 | 0 | 0 |
| 5 | 1 | 1 |
| 6 | 2 | 2 |
| 7 | 3 | 3 |

Figure 5-35 4 × 3.5-inch Drive + 4 × 2.5-inch Drive Configuration



| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card (1 RAID controller card is used) |
|--------------------|-------------------------------|---|
| 0 | 0 | 0 |
| 1 | 1 | 1 |
| 2 | 2 | 2 |
| 3 | 3 | 3 |
| 4 | 4 | 4 |
| 5 | 5 | 5 |
| 6 | 6 | 6 |
| 7 | 7 | 7 |


Figure 5-36 10 × 2.5-inch Drive Configuration



| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card (1 16i RAID controller card is used) |
|--------------------|-------------------------------|---|
| 0 | 0 | 0 |
| 1 | 1 | 1 |


| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card (1 16i RAID controller card is used) |
|--------------------|-------------------------------|---|
| 2 | 2 | 2 |
| 3 | 3 | 3 |
| 4 | 4 | 4 |
| 5 | 5 | 5 |
| 6 | 6 | 6 |
| 7 | 7 | 7 |
| 8 | 8 | 8 |
| 9 | 9 | 9 |

Figure 5-37 12 × 2.5-inch Drive Configuration



| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card (1 16i RAID controller card is used) |
|--------------------|-------------------------------|---|
| 0 | 0 | 0 |
| 1 | 1 | 1 |
| 2 | 2 | 2 |
| 3 | 3 | 3 |
| 4 | 4 | 4 |
| 5 | 5 | 5 |
| 6 | 6 | 6 |
| 7 | 7 | 7 |
| 8 | 8 | 8 |
| 9 | 9 | 9 |
| 10 | 10 | 10 |
| 11 | 11 | 11 |

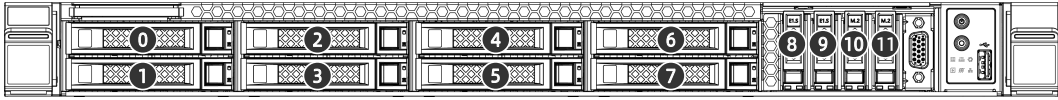Figure 5-38 8 × 2.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration (8 × NVMe)



| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card (2.5-inch drives connected to a RAID controller card) |
|--------------------|-------------------------------|--|
| 0 | 0 | 0 |
| 1 | 1 | 1 |
| 2 | 2 | 2 |
| 3 | 3 | 3 |
| 4 | 4 | 4 |
| 5 | 5 | 5 |
| 6 | 6 | 6 |
| 7 | 7 | 7 |
| 8 | 0 | - |
| 9 | 1 | - |
| 10 | 0 | - |
| 11 | 1 | - |


Figure 5-39 32 × E1.S SSD Configuration



| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card | Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card |
|--------------------|-------------------------------|--|--------------------|-------------------------------|--|
| 0 | 0 | 0 | 16 | 16 | 16 |
| 1 | 1 | 1 | 17 | 17 | 17 |
| 2 | 2 | 2 | 18 | 18 | 18 |
| 3 | 3 | 3 | 19 | 19 | 19 |
| 4 | 4 | 4 | 20 | 20 | 20 |
| 5 | 5 | 5 | 21 | 21 | 21 |

| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card | Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card |
|--------------------|-------------------------------|--|--------------------|-------------------------------|--|
| 6 | 6 | 6 | 22 | 22 | 22 |
| 7 | 7 | 7 | 23 | 23 | 23 |
| 8 | 8 | 8 | 24 | 24 | 24 |
| 9 | 9 | 9 | 25 | 25 | 25 |
| 10 | 10 | 10 | 26 | 26 | 26 |
| 11 | 11 | 11 | 27 | 27 | 27 |
| 12 | 12 | 12 | 28 | 28 | 28 |
| 13 | 13 | 13 | 29 | 29 | 29 |
| 14 | 14 | 14 | 30 | 30 | 30 |
| 15 | 15 | 15 | 31 | 31 | 31 |

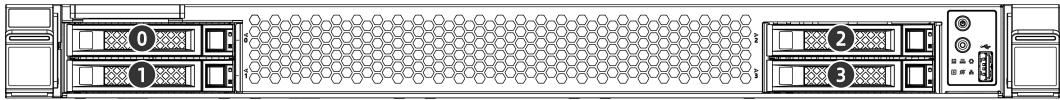Figure 5-40 EVAC Heatsink Configuration



| Physical Drive No. | Drive No. Identified by ISBMC | Drive No. Identified by RAID Controller Card |
|--------------------|-------------------------------|--|
| 0 | 0 | 0 |
| 1 | 1 | 1 |
| 2 | 2 | 2 |
| 3 | 3 | 3 |

5.5.3 Drive LEDs

1. SAS/SATA Drive LEDs

Figure 5-41 SAS/SATA Drive LEDs

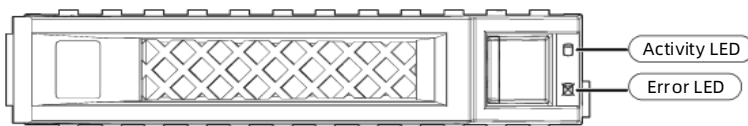


Table 5-13 SAS/SATA Drive LED Description

| Activity LED (Green) | Error LED (Blue/Red) | | Status Description |
|----------------------|----------------------|--------------|------------------------------|
| | Blue | Red | |
| Off | Off | RAID created | RAID not created |
| | | Solid on | Off |
| Solid on | Off | Off | |
| Flashing | Off | Off | |
| Flashing | Solid pink | | Copyback/Rebuild in progress |
| Solid on | Solid on | Off | |
| Flashing | Solid on | Off | |
| Off | Solid on | Off | |
| - | Off | Solid on | |

5.5.4 RAID Controller Cards

The RAID controller card supports RAID configuration, RAID level migration, drive roaming, and other functions. For specific RAID controller card options, consult your local Inspur sales representative or refer to [7.2 Hardware Compatibility](#).

5.6 Network

NICs provide network expansion capabilities.

- The OCP slots support OCP 3.0 cards. Users can select the optional OCP 3.0 cards as needed.
- The PCIe slots support PCIe NICs. Users can select the cards as needed.
- For specific NIC options, consult your local Inspur sales representative or refer to [7.2 Hardware Compatibility](#).

5.7 I/O Expansion

5.7.1 PCIe Cards


- The PCIe cards provide system expansion capabilities.
- The server supports 1 dedicated OCP 3.0 slot and up to 3 PCIe 3.0 slots.

- For specific PCIe expansion card options, consult your local Inspur sales representative or refer to [7.2 Hardware Compatibility](#).

5.7.2 PCIe Slots


1. PCIe Slot Layout

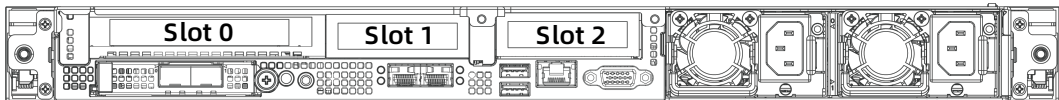Figure 5-42 PCIe Slots - 3 × PCIe




- Slot 0 and slot 1 reside in the left PCIe riser-card assembly.
- Slot 2 resides in the right PCIe riser-card assembly.

Figure 5-43 PCIe Slots - 2 × PCIe



- Slot 0 resides in the left PCIe riser-card assembly.
- Slot 1 resides in the right PCIe riser-card assembly.

Figure 5-44 PCIe Slot - 1 × PCIe




- Slot 2 resides in the right PCIe riser-card assembly.

2. PCIe Riser-Card Assemblies


- The left PCIe riser-card assembly 1 provides 2 PCIe slots. Slots 0 and 1 reside in this assembly.

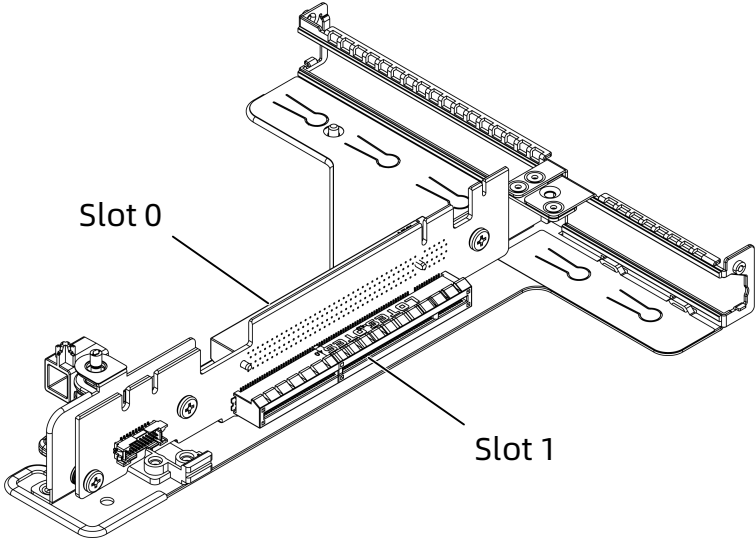Figure 5-45 Left PCIe Riser-Card Assembly 1




- The right PCIe riser-card assembly 1 provides 1 PCIe slot. Slot 2 resides in this assembly.

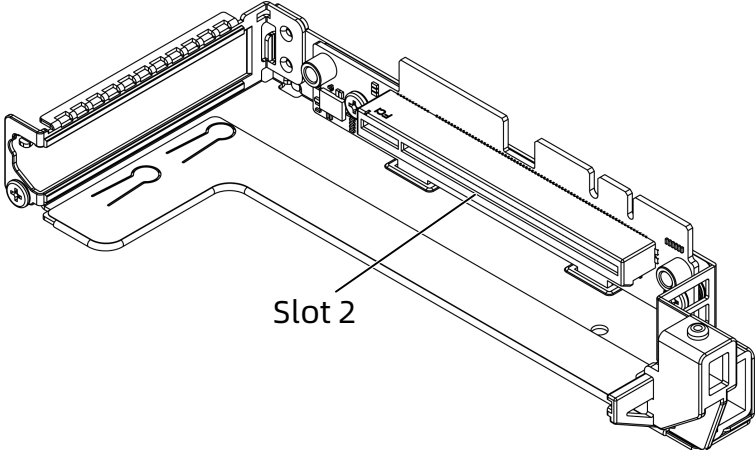Figure 5-46 Right PCIe Riser-Card Assembly 1




- The left PCIe riser-card assembly 2 provides 1 PCIe slot. Slot 0 resides in this assembly.

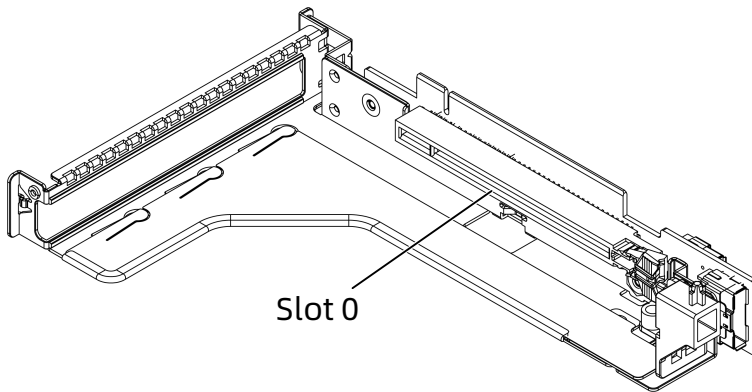Figure 5-47 Left PCIe Riser-Card Assembly 2



- The right PCIe riser-card assembly 2 provides 1 PCIe slot. Slot 1 resides in this assembly.

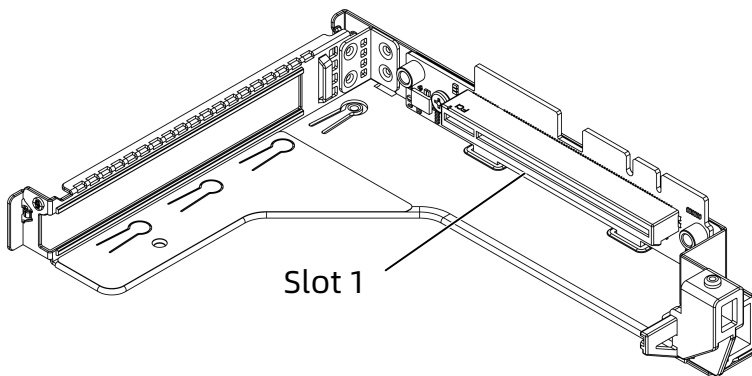Figure 5-48 Right PCIe Riser-Card Assembly 2



5.7.3 PCIe Slot Description



NOTE

When CPU1 is not present, the corresponding PCIe slots do not work.

1. Servers Configured with Rear PCIe Riser-Card Assemblies


Table 5-14 PCIe Slot Description

| PCIe Slot | Owner | PCIe Standard | Connector Width | Bus Width | Port Number | Root Port (B/D/F) | Form Factor |
|--------------|-------|---------------|-----------------|-----------|-------------|-------------------|-----------------------|
| Slot 0 | CPU0 | PCIe 4.0 | ×16 | ×16 | PE2 | 32:00.0 | HHHL |
| Slot 1 | CPU1 | PCIe 4.0 | ×16 | ×16 | PE1 | 57:00.0 | HHHL |
| Slot 2 | CPU1 | PCIe 4.0 | ×16 | ×16 | PE2 | ec:02.0 | HHHL |
| OCP 3.0 Slot | CPU0 | PCIe 4.0 | ×16 | ×16 | PE0 | 23:00.0 | Standard OCP 3.0 slot |

5.8 PSUs

- Supports 1 or 2 PSUs.
- Supports AC or DC power input.
- The PSUs are hot-swappable.
- The server supports 2 PSUs with 1+1 redundancy.
- The server must use PSUs of the same part number (P/N code).
- The server provides short-circuit protection, and provides PSUs supporting dual-live-wire input.

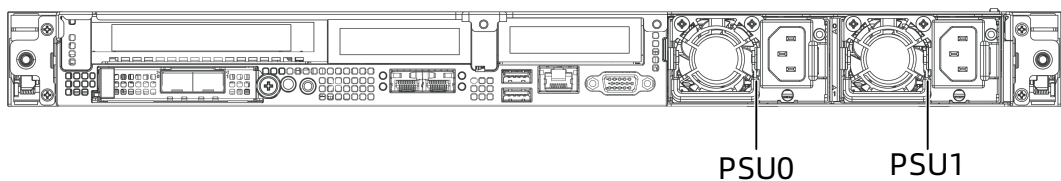Figure 5-49 PSU Layout




5.9 Fans

- Supports 8 4056 fans. High-performance fans and standard fans can be selected based on actual configuration.
- The fans are hot-swappable.

- Support N+1 redundancy, allowing the server to continue working normally when one fan fails.
- Supports intelligent fan speed control.
- The server must use fans of the same part number (P/N code).

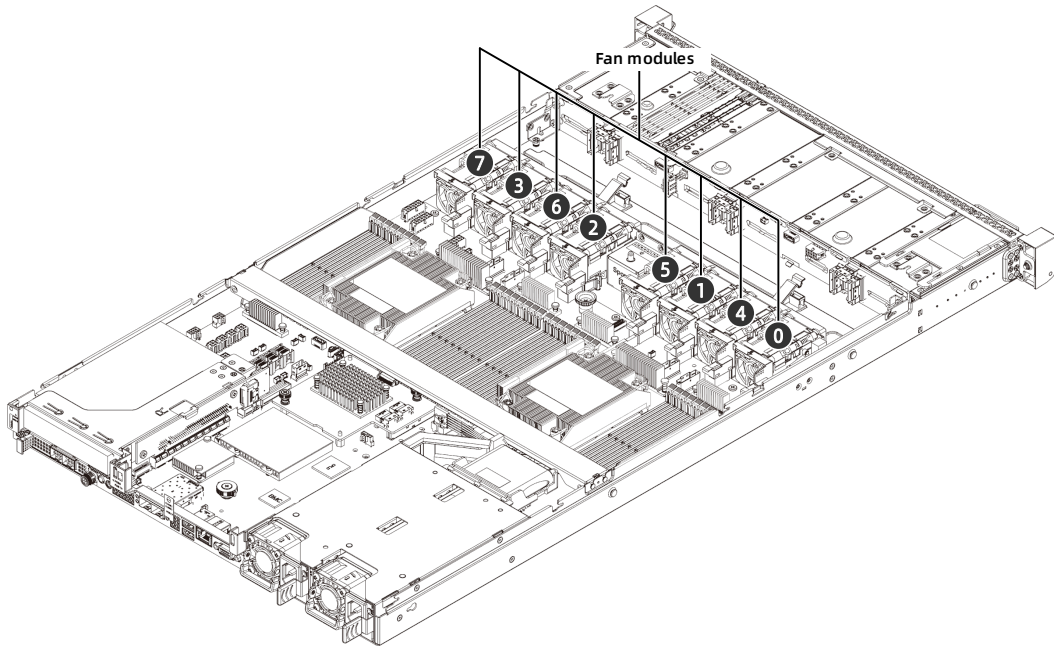Figure 5-50 Fan Module Layout




5.10 LCD Module (Optional)

5.10.1 Function

The LCD module reads server-related information from the BMC, such as the operating status of processors and memories, network status, logs, and alerts, and transmits the information to client mobile terminals via Bluetooth.


The LCD module synchronizes information with the ISBMC through I²C and can display information on an LCD screen or in the app. The server's basic information, system status and alert diagnosis can be displayed in the app via Bluetooth, facilitating the operation and maintenance.

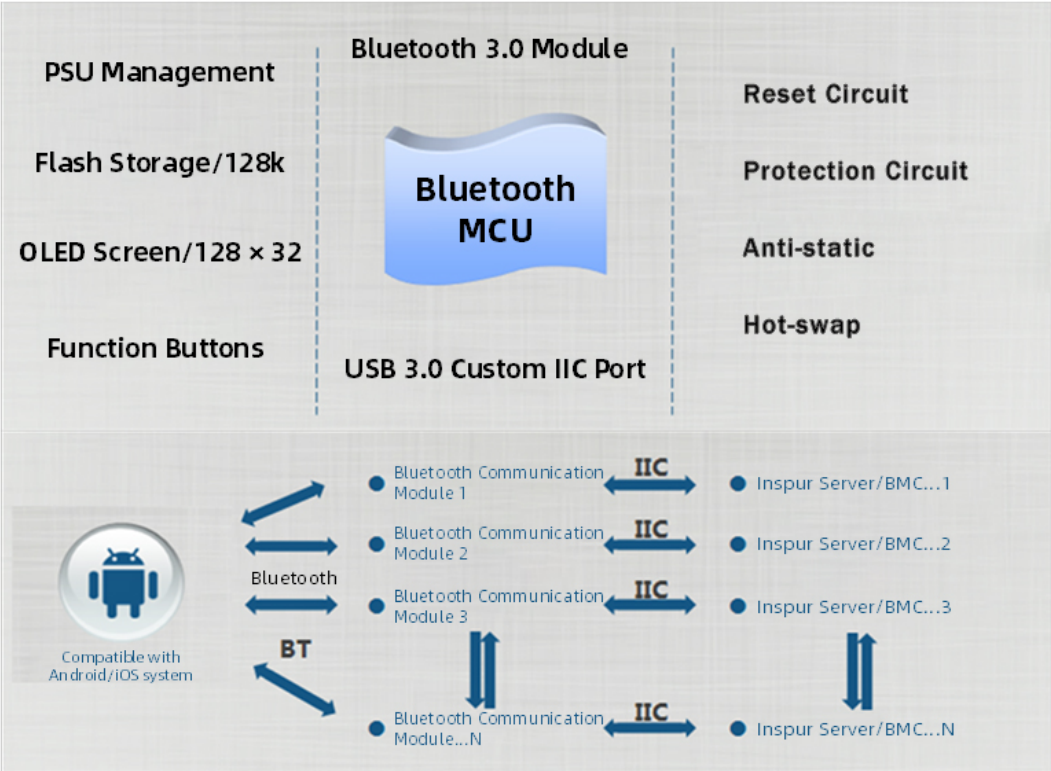Figure 5-51 How LCD Subsystem Works



5.10.2 Interface

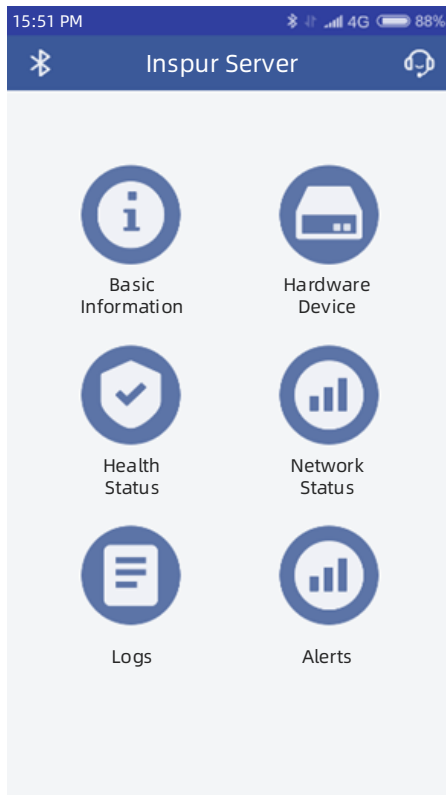
Figure 5-52 App Home Screen



5.11 Boards

5.11.1 Motherboard

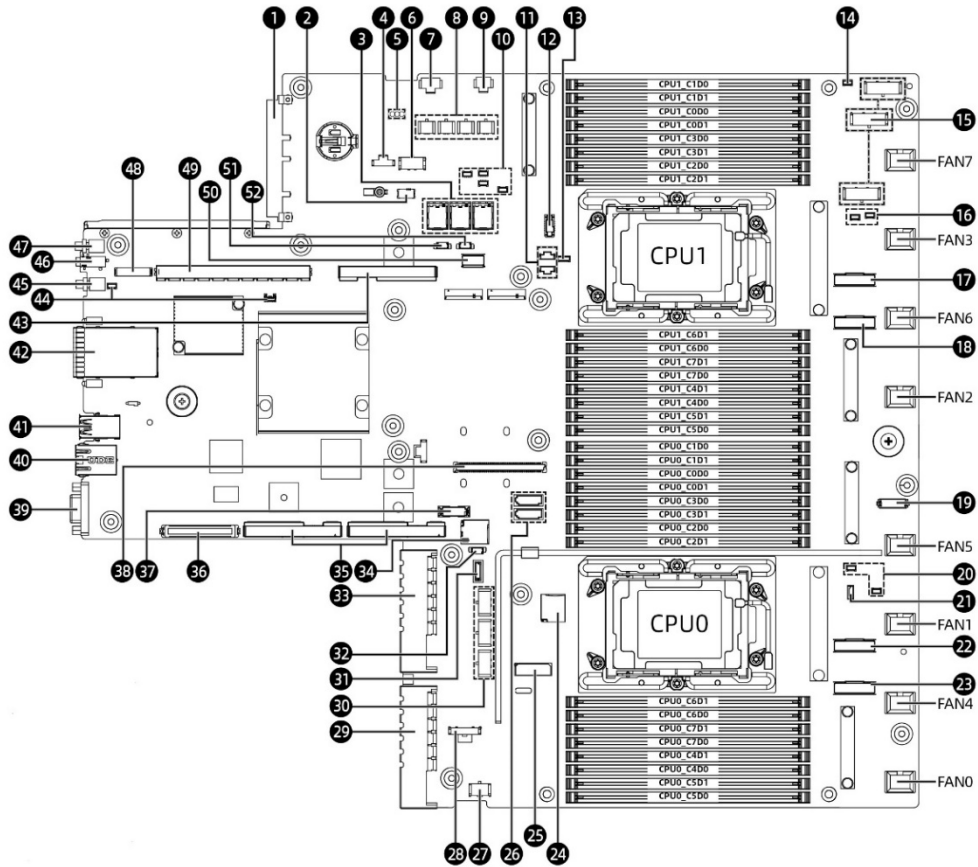Figure 5-53 Motherboard Layout




| Item | Feature | Item | Feature |
|------|-------------------------------------|------|------------------------------------|
| 1 | OCP 3.0 Connector | 2 | TPM Slot |
| 3 | Mini_SAS Connector × 3 | 4 | GPU_RISER0 Power Connector |
| 5 | CLR_CMOS Connector | 6 | GPU0&MID_PClE Power Connector |
| 7 | Mid-Backplane Power Connector | 8 | Rear Backplane Power Connector × 4 |
| 9 | GPU_RISER1&MID_PClE Power Connector | 10 | I ² C Connector × 4 |
| 11 | CLK Connector × 2 | 12 | VPP Connector |
| 13 | SGPIO Connector | 14 | Sensor Connector |
| 15 | Front Backplane Power Connector × 3 | 16 | I ² C Connector × 2 |
| 17 | SLIM0_CPU1 Connector | 18 | SLIM1_CPU1 Connector |

| Item | Feature | Item | Feature |
|------|--------------------------------------|------|----------------------------------|
| 19 | Left Mounting Ear Connector | 20 | I ² C Connector × 2 |
| 21 | Intrusion Switch Connector | 22 | SLIM0_CPU0 Connector |
| 23 | SLIM1_CPU0 Connector | 24 | SYS_TF Card Slot |
| 25 | Debug Connector | 26 | SATA Connector × 2 |
| 27 | B_M.2&3BP&GPU_RISER3 Power Connector | 28 | Capacitor Board Connector |
| 29 | PSU1 Connector | 30 | GPU Power Connector |
| 31 | RAID Key Connector | 32 | I ² C4_GPU2 Connector |
| 33 | PSU0 Connector | 34 | BMC TF Card Slot |
| 35 | PCIe0_CPU0 Slot | 36 | PCIe0_CPU0 Power Connector |
| 37 | NCSI Connector | 38 | OCPA_CPU0 Slot |
| 39 | VGA Port | 40 | BMC Management Network Port |
| 41 | USB 3.0 Port | 42 | Onboard Network Port |
| 43 | PCIe_CPU1 Slot | 44 | Leak Detection Connector × 2 |
| 45 | Power Button and LED | 46 | System/BMC Serial Port |
| 47 | UID/BMC RST Button and LED | 48 | PCIe1_CPU1 Power Connector |
| 49 | PCIe0_CPU1 Slot | 50 | Right Mounting Ear Connector |
| 51 | I ² C4_GPU4 Connector | 52 | I ² C Connector |

5.11.2 Drive Backplanes


1. Front Drive Backplanes

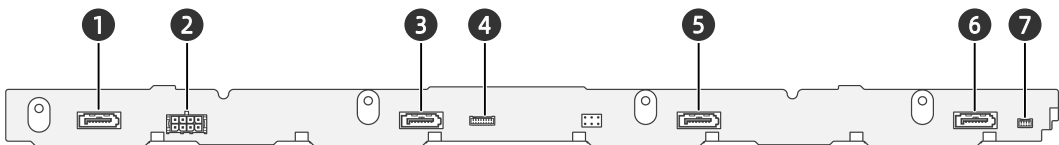Figure 5-54 4 × 3.5-inch SAS/SATA Drive Backplane




| Item | Feature | Item | Feature |
|------|----------------------------|------|-----------------|
| 1 | SATA Connector | 2 | Power Connector |
| 3 | SATA Connector | 4 | SGPIO Connector |
| 5 | SATA Connector | 6 | SATA Connector |
| 7 | I ² C Connector | | |

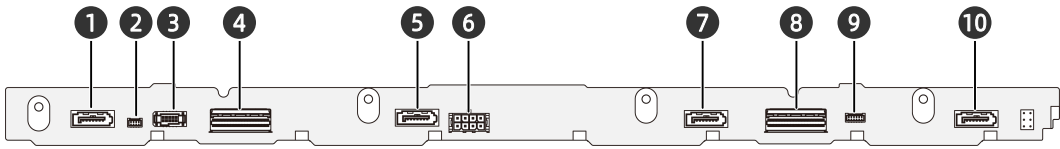Figure 5-55 4 × 3.5-inch SAS/SATA//NVMe Drive Backplane




| Item | Feature | Item | Feature |
|------|-----------------|------|----------------------------|
| 1 | SATA Connector | 2 | I ² C Connector |
| 3 | VPP Connector | 4 | Slimline x8 Connector |
| 5 | SATA Connector | 6 | Power Connector |
| 7 | SATA Connector | 8 | Slimline x8 Connector |
| 9 | SGPIO Connector | 10 | SATA Connector |

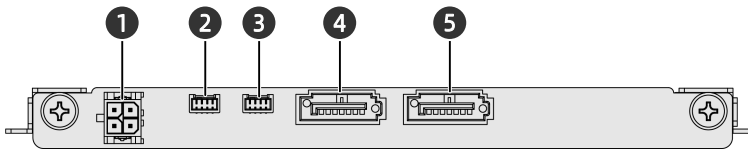Figure 5-56 2 × M.2 Drive Backplane




| Item | Feature | Item | Feature |
|------|----------------------------|------|-----------------|
| 1 | Power Connector | 2 | SGPIO Connector |
| 3 | I ² C Connector | 4 | SATA Connector |
| 5 | SATA Connector | | |

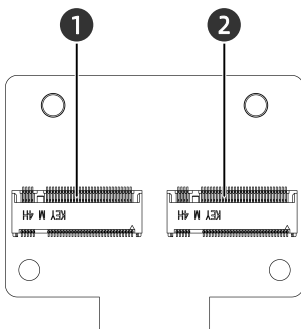Figure 5-57 2 × M.2 Adapter




| Item | Feature | Item | Feature |
|------|---------------------|------|---------------------|
| 1 | M.2 SSD Connector 1 | 2 | M.2 SSD Connector 0 |

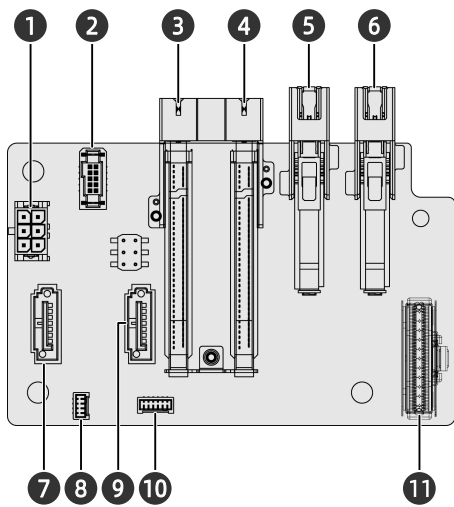Figure 5-58 2 × M.2 SSD + 2 × E1.S SSD Drive Backplane




| Item | Feature | Item | Feature |
|------|-----------------------|------|----------------------------|
| 1 | Power Connector | 2 | VPP Connector |
| 3 | M.2 SSD Connector | 4 | M.2 SSD Connector |
| 5 | E1.S SSD Connector | 6 | E1.S SSD Connector |
| 7 | SATA Connector | 8 | I ² C Connector |
| 9 | SATA Connector | 10 | SGPIO Connector |
| 11 | Slimline x8 Connector | | |

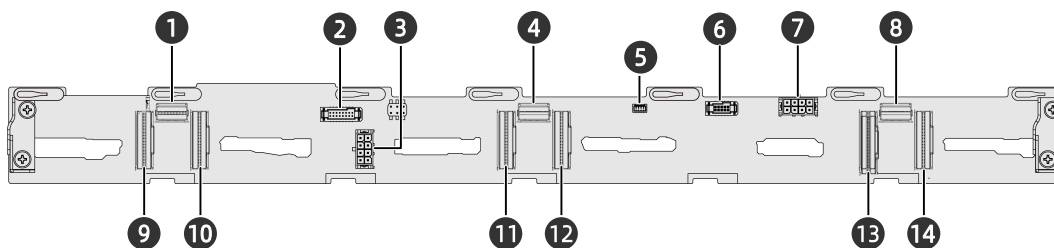Figure 5-59 12 × 2.5- inch SAS/SATA//NVMe Drive Backplane




| Item | Feature | Item | Feature |
|------|----------------------------|------|-------------------------------|
| 1 | Slimline x4 Connector | 2 | Front Control Panel Connector |
| 3 | Power Connector | 4 | Slimline x4 Connector |
| 5 | I ² C Connector | 6 | VPP Connector |
| 7 | Power Connector | 8 | Slimline x4 Connector |
| 9 | Slimline x8 Connector | 10 | Slimline x8 Connector |
| 11 | Slimline x8 Connector | 12 | Slimline x8 Connector |
| 13 | Slimline x8 Connector | 14 | Slimline x8 Connector |

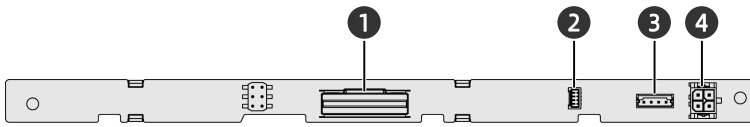Figure 5-60 2 × E1.5 SSD Drive Backplane




| Item | Feature | Item | Feature |
|------|-----------------------|------|----------------------------|
| 1 | Slimline x8 Connector | 2 | I ² C Connector |
| 3 | VPP Connector | 4 | Power Connector |

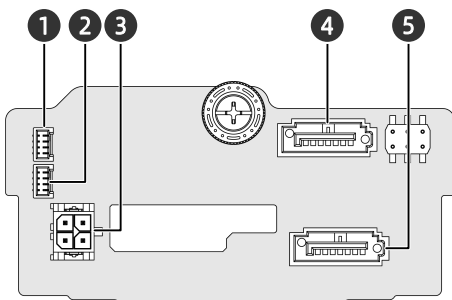Figure 5-61 2 × SAS/SATA Drive Backplane




| Item | Feature | Item | Feature |
|------|-----------------|------|----------------------------|
| 1 | SGPIO Connector | 2 | I ² C Connector |
| 3 | Power Connector | 4 | SATA Connector |
| 5 | SATA Connector | | |

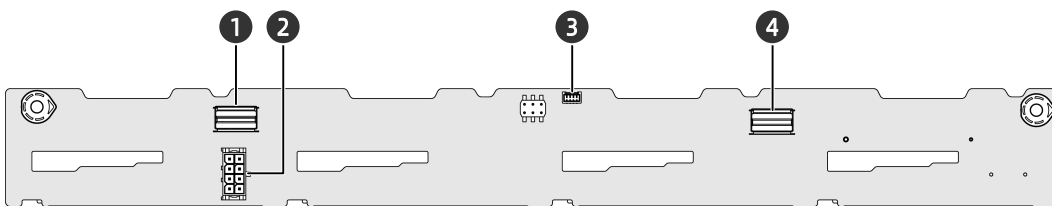Figure 5-62 8 × 2.5-inch SAS/SATA Drive Backplane




| Item | Feature | Item | Feature |
|------|----------------------------|------|-----------------------|
| 1 | Slimline x4 Connector | 2 | Power Connector |
| 3 | I ² C Connector | 4 | Slimline x4 Connector |

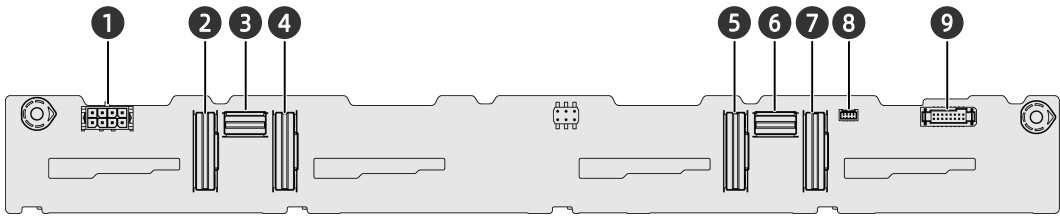Figure 5-63 8 × 2.5-inch SAS/SATA/NVMe Drive Backplane




| Item | Feature | Item | Feature |
|------|-----------------------|------|----------------------------|
| 1 | Power Connector | 2 | Slimline x8 Connector |
| 3 | Slimline x4 Connector | 4 | Slimline x8 Connector |
| 5 | Slimline x8 Connector | 6 | Slimline x4 Connector |
| 7 | Slimline x8 Connector | 8 | I ² C Connector |
| 9 | VPP Connector | | |

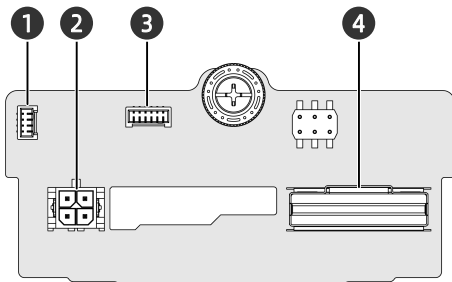Figure 5-64 2 × 2.5-inch NVMe Drive Backplane




| Item | Feature | Item | Feature |
|------|----------------------------|------|-----------------------|
| 1 | I ² C Connector | 2 | Power Connector |
| 3 | VPP Connector | 4 | Slimline x8 Connector |

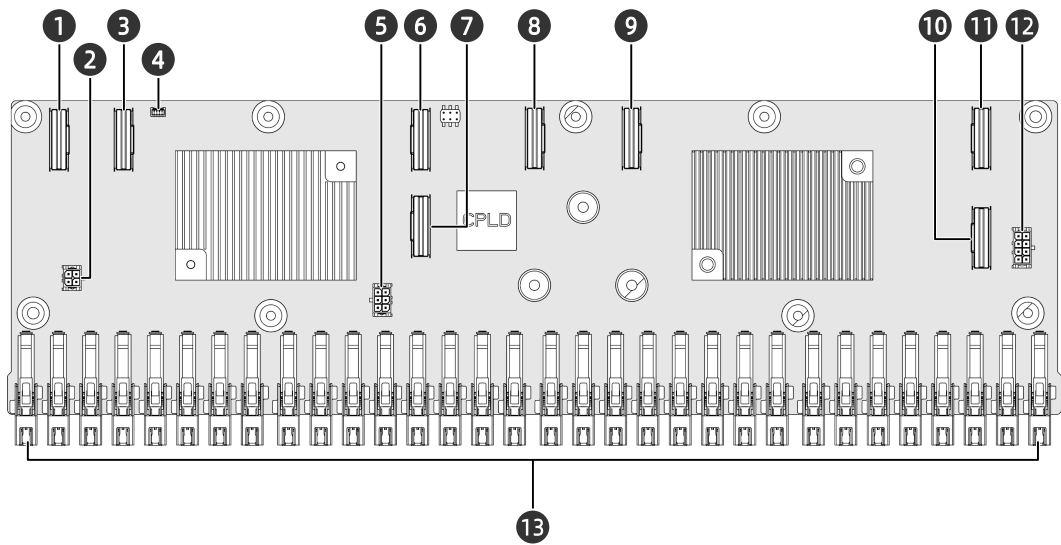Figure 5-65 32 × E1.5 SSD Drive Backplane




| Item | Feature | Item | Feature |
|------|-------------------------|------|----------------------------|
| 1 | Slimline x8 Connector | 2 | Power Connector |
| 3 | Slimline x8 Connector | 4 | I ² C Connector |
| 5 | Power Connector | 6 | Slimline x8 Connector |
| 7 | Slimline x8 Connector | 8 | Slimline x8 Connector |
| 9 | Slimline x8 Connector | 10 | Slimline x8 Connector |
| 11 | Slimline x8 Connector | 12 | Connector |
| 13 | E1.5 SSD Connector × 32 | | |

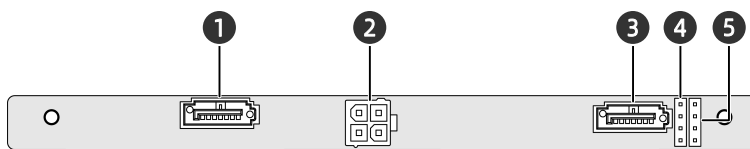Figure 5-66 2 × 2.5-inch SAS/SATA Drive Backplane



| Item | Feature | Item | Feature |
|------|----------------------------|------|-----------------|
| 1 | SATA Connector | 2 | Power Connector |
| 3 | SATA Connector | 4 | SGPIO Connector |
| 5 | I ² C Connector | | |

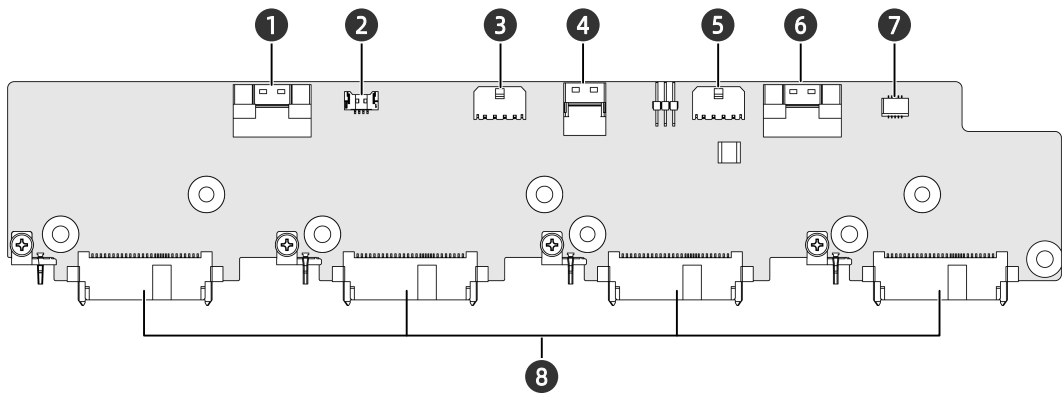
Figure 5-67 4 × 2.5-inch SAS/SATA/NVMe Drive Backplane



| Item | Feature | Item | Feature |
|------|-----------------------|------|----------------------------|
| 1 | Slimline x8 Connector | 2 | I ² C Connector |
| 3 | Power Connector | 4 | Slimline x4 Connector |
| 5 | Power Connector | 6 | Slimline x8 Connector |
| 7 | VPP Connector | 8 | SFF8639 Connector × 4 |

2. Internal Drive Backplane

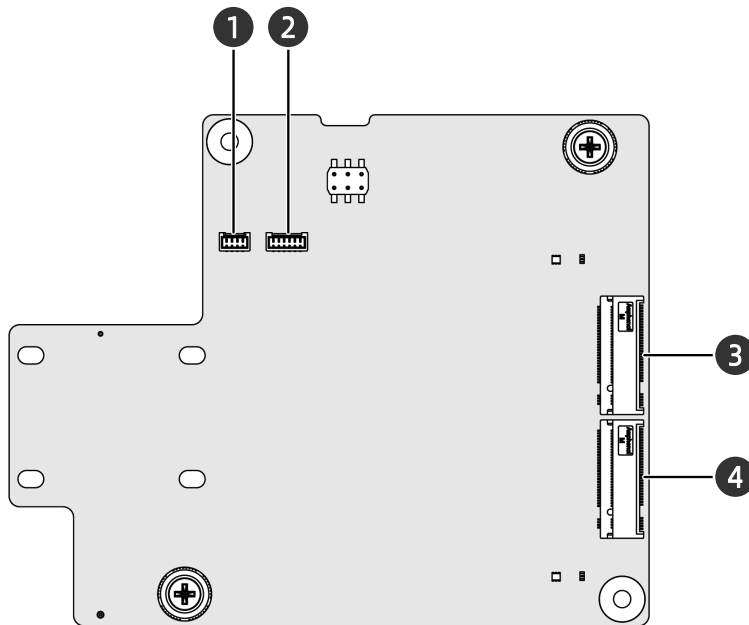Figure 5-68 2 × M.2 Adapter



| Item | Feature | Item | Feature |
|------|----------------------------|------|-------------------|
| 1 | I ² C Connector | 2 | VPP Connector |
| 3 | M.2 SSD Connector | 4 | M.2 SSD Connector |

6 Product Specifications

6.1 Technical Specifications

Table 6-1 Technical Specifications

| Item | Description |
|-------------|--|
| Form Factor | 1U rack server |
| Processor | <ul style="list-style-type: none"> • 1 to 2 Intel Xeon Scalable processors of 6300, 8300, 5300 or 4300 series • Up to 40 cores (base frequency at 2.3 GHz) • Max. base frequency at 3.6 GHz (8 cores) • 3 UPI links at up to 11.2 GT/s • L3 cache up to 1.5 MB per core • TDP up to 270 W |
| Chipset | Intel C621A |
| Memory | <ul style="list-style-type: none"> • Up to 32 DIMMs • 8 memory channels per CPU with up to 2 DIMM slots per channel • Up to 3,200 MT/s • RDIMMs and Optane PMem 200 series supported • ECC, memory mirroring and memory rank sparing |
| Storage | <p>Front panel:</p> <ul style="list-style-type: none"> • 12 × 2.5-inch SATA/SAS/NVMe drive (hot-swap, up to 12 × NVMe drive) • 32 × E1.S SSD (hot-swap) • 4 × 3.5-inch SAS/SATA/NVMe drive + 2 × M.2 SSD + 2 × E1.S SSD (M.2 SSDs are non-hot-swap) • 4 × 3.5-inch SAS/SATA/NVMe drive + 4 × 2.5-inch SAS/SATA/NVMe drive (hot-swap) • 10 × 2.5-inch SAS/SATA/NVMe drive (hot-swap) • 8 × 2.5-inch SAS/SATA/NVMe drive + 2 × E1.S SSD + 2 × M.2 SSD (M.2 SSDs are non-hot-swap) <p>Rear panel:</p> <ul style="list-style-type: none"> • 2 × 2.5-inch SAS/SATA drive (hot-swap) <p>Internal storage:</p> <ul style="list-style-type: none"> • Up to 2 × TF card, 1 for BIOS and BMC respectively • Up to 2 × SATA M.2 SSD |

| Item | Description |
|--------------------|--|
| | <ul style="list-style-type: none"> Up to 2 × PCIe x4 M.2 SSD |
| Storage Controller | <ul style="list-style-type: none"> RAID controller cards SAS controller cards The onboard PCH supports 14 × SATA connector (2 × SATA 7-pin connector + 3 × MiniSAS HD connector) Onboard Intel NVMe controllers (1 optional Intel NVMe RAID key) |
| Network | <ul style="list-style-type: none"> 1 optional OCP 3.0 card module (1/10/25/40/100 Gb) A pair of onboard 10 Gb network ports (optional) A pair of onboard 1 Gb network ports (optional) Standard PCIe NICs of 1/10/25/40/100 Gb |
| I/O Expansion | <ul style="list-style-type: none"> Up to 3 standard PCIe 4.0 x16 cards, 1 OCP 3.0 card and 1 optional PCIe x8 mezz card 2 standard PCIe 4.0 x16 cards for single-CPU configuration |
| Port | <p>Front:</p> <ul style="list-style-type: none"> 1 × USB 3.0 port 1 × USB 2.0 port 1 × VGA port <p>Rear:</p> <ul style="list-style-type: none"> 2 × USB 3.0 port 1 × VGA port 1 × BMC/system serial port |
| Fan | 8 hot-swap 4056 fans in N+1 redundancy |
| Power Supply | <p>PSUs of 550/800/1,300 W or above with 1+1 redundancy</p> <ul style="list-style-type: none"> 110 VAC - 230 VAC: 90 V to 264 V 240 VDC: 180 V to 320 V 336 VDC: 260 V to 400 V -48 VDC: -40 V to -72 V |
| System Management | Integrated with 1 independent 1,000 Mbps network port, dedicated to IPMI remote management |
| Operating System | <ul style="list-style-type: none"> Microsoft Windows Server 2008/2012/2016/2019 Red Hat Enterprise Linux 6/7/8 SUSE Linux Enterprise Server 11/12 |

6.2 Environmental Specifications

Table 6-2 Environmental Specifications

| Item | Parameter |
|--------------------------------|--|
| Temperature ^{1, 2, 3} | <ul style="list-style-type: none"> Operating: 5°C to 45°C (41°F to 113°F) |

| Item | Parameter |
|--|---|
| | <ul style="list-style-type: none"> • Storage (packed): -40°C to +70°C (-40°F to +158°F) • Storage (unpacked): -40°C to +55°C (-40°F to +131°F) |
| Relative Humidity (RH, non-condensing) | <ul style="list-style-type: none"> • Operating: 5% to 90% RH • Storage (packed): 5% to 93% RH • Storage (unpacked): 5% to 93% RH |
| Operating Altitude | <p>≤ 3,050 m (10,007 ft)</p> <ul style="list-style-type: none"> • 0 - 1,000 m (0 - 3,281 ft): The operating temperature ranges from 0°C to 40°C (32°F to 104°F). • 1,000 - 3,050 m (3,281 - 10,007 ft): The operating temperature ranges from 5°C to 32°C (41°F to 89.6°F). |
| Corrosive Airborne Contaminants | <p>Maximum growth rate of corrosion film thickness:</p> <ul style="list-style-type: none"> • Copper coupon: 300 Å/month (compliant with the gaseous corrosivity level of G1 defined in ANSI/ISA-71.04-2013) • Silver coupon: 200 Å/month (compliant with the gaseous corrosivity level of G1 defined in ANSI/ISA-71.04-2013) |
| Noise ^{4,5,6} | <p>Noise emissions are measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Listed are the declared A-Weighted sound power levels (LWAd) and the declared average bystander position A-weighted sound pressure levels (LpAm) at a server operating temperature of 23°C (73.4°F):</p> <ul style="list-style-type: none"> • Idle: <ul style="list-style-type: none"> - LWAd: 5.8 B for standard configurations - LpAm: 49 dBA for standard configurations • Operating: <ul style="list-style-type: none"> - LWAd: 6.4 B for standard configurations |

| Item | Parameter |
|------|--|
| | - LpAm: 53 dBA for standard configurations |

Notes:

1. Not all configurations support an operating temperature range of 5°C to 45°C (41°F to 113°F). The GPU configuration supports an operating temperature range of 10°C to 30°C (50°F to 86°F).
2. Standard operating temperature:
 - For temperatures between 10°C and 35°C (50°F and 95°F), de-rate the maximum allowable temperature by 1°C per 305 m (1°F per 556 ft) above sea level. Please keep the product away from direct sunlight. The maximum temperature gradient is 20°C/h (36°F/h) and the maximum operating altitude is 3,050 m (10,007 ft), both varying with server configuration.
 - Any fan failure or operations above 30°C (86°F) may lead to system performance degradation.
3. Expanded operating temperature:
 - As for certain approved configurations, the supported system inlet ambient temperature can be expanded to 5°C to 10°C (41°F to 50°F) and 35°C to 45°C (95°F to 113°F) at sea level. At an altitude of 900 to 3,050 m (2,953 to 10,007 ft), de-rate the maximum allowable operating temperature by 1°C per 175 m (1°F per 319 ft).
 - As for certain approved configurations, the supported system inlet ambient temperature can be expanded to 35°C to 45°C (95°F to 113°F) at sea level. At an altitude of 900 to 3,050 m (2,953 to 10,007 ft), de-rate the maximum allowable temperature by 1°C per 125 m (1°F per 228 ft).
 - Any fan failure or operations under expanded environments may lead to system performance degradation.
4. This document lists the LWAd and LpAm of the product at a 23°C (73.4°F) ambient environment. All measurements are conducted in conformance with ISO 7779 (ECMA 74) and declared in conformance with ISO 9296 (ECMA 109). The listed sound levels apply to the standard configuration. Additional options may result in increased sound levels. Contact your sales representative for more information.
5. The sound levels shown here were measured based on the specific configuration of a server. Sound levels vary with server configuration. These values are for reference only and subject to change without notice.

6. Product conformance to cited normative standards is based on sample testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

6.3 Physical Specifications

Table 6-3 Physical Specifications

| Item | Description |
|--|--|
| Chassis Dimensions (W × H × D) | Standard configurations <ul style="list-style-type: none"> • With mounting ears: 482 × 43.05 × 811.8 mm (18.98 × 1.69 × 31.96 in.) • Without mounting ears: 438 × 43.05 × 780 mm (17.24 × 1.69 × 30.71 in.) 32 × E1.S configuration <ul style="list-style-type: none"> • With mounting ears: 482 × 43.05 × 871.8 mm (18.98 × 1.69 × 34.32 in.) • Without mounting ears: 438 × 43.05 × 840 mm (17.24 × 1.69 × 33.07 in.) |
| Outer Packaging Dimensions (L × W × H) | <ul style="list-style-type: none"> • 780-depth chassis: 1,031 × 651 × 247 mm (40.59 × 25.63 × 9.72 in.) • 840-depth chassis: 1,080 × 600 × 240 mm (42.52 × 23.62 × 9.45 in.) |
| Weight (Mainstream Configuration) | 4 × 3.5-inch drive configuration (rear 2.5-inch drives included) <ul style="list-style-type: none"> • Net weight (unpacked): approx. 21 kg (46.30 lbs) • Gross weight (including chassis, packaging, rails, and accessory box): 31.5 kg (69.45 lbs) 10 × 2.5-inch drive configuration (rear 2.5-inch drives included) <ul style="list-style-type: none"> • Net weight (unpacked): approx. 21 kg (46.30 lbs) • Gross weight (including chassis, packaging, rails, and accessory box): 31 kg (68.34 lbs) |

7 Operating System and Hardware Compatibility

This chapter describes the OS and hardware compatibility of the NF5180M6. For the latest compatibility configuration and the component models not listed in this document, contact your local Inspur sales representative.

i IMPORTANT

- Using incompatible components may cause the server to work abnormally, and such failures are not covered by technical support or warranty.
- The server performance is strongly influenced by application software, middleware and hardware. The subtle differences in them may lead to performance variation in the application and test software.
 - For requirements on the performance of specific application software, contact Inspur sales representatives to confirm the detailed hardware and software configurations during the pre-sales phase.
 - For requirements on hardware performance consistency, define specific configuration requirements (for example, specific drive models, RAID controller cards, or firmware versions) during the pre-sales phase.

7.1 Supported Operating Systems

Table 7-1 Supported Operating Systems

| OS | Version |
|---------|------------------------------|
| Windows | Windows Server 2019 |
| Red Hat | Red Hat Enterprise Linux 7.9 |
| | Red Hat Enterprise Linux 8.2 |
| | Red Hat Enterprise Linux 8.3 |
| SUSE | SLES 12.5 |
| | SLES 15.2 |
| CentOS | CentOS 7.9 |
| | CentOS 8.2 |
| | CentOS 8.3 |

| OS | Version |
|-------------|-------------------|
| VMware ESXi | VMware ESXi 7.0 |
| | VMware ESXi 7.0U1 |
| Ubuntu | Ubuntu 18.04.05 |
| | Ubuntu 20.04 |
| | Ubuntu 20.04.1 |

7.2 Hardware Compatibility

7.2.1 CPU Specifications

The NF5180M6 supports up to 2 Intel Xeon Scalable processors.

Table 7-2 CPU Specifications

| Model | Cores | Base Frequency (GHz) | TDP (W) |
|---|-------|----------------------|---------|
| CPU_I_6314U-Xeon2.3_32C_48M_205W-D2 | 32 | 2.3 | 205 |
| CPU_I_6346-Xeon3.1_16C_24M_205W-D2 | 16 | 3.1 | 205 |
| CPU_I_6354-Xeon3.0_18C_27M_205W-D2 | 18 | 3.0 | 205 |
| CPU_I_6330-Xeon2_28C_42M_205W-D2 | 28 | 2.0 | 205 |
| CPU_I_6348-Xeon2.6_28C_42M_235W-D2 | 28 | 2.6 | 235 |
| CPU_I_6338-Xeon2.0_32C_48M_205W-D2 | 32 | 2.0 | 205 |
| CPU_I_6330N-Xeon2.2_28C_42M_165W-D2 | 28 | 2.2 | 165 |
| CPU_I_6338N-Xeon2.2_32C_48M_185W-D2 | 32 | 2.2 | 185 |
| CPU_I_8380-Xeon2.3_40C_60M_270W-D2 | 40 | 2.3 | 270 |
| CPU_I_8352V-Xeon2.1_36C_54M_195W-D2 | 36 | 2.1 | 195 |
| CPU_I_8360Y-Xeon2.4_36C_54M_250W-D2 | 36 | 2.4 | 250 |
| CPU_I_8358-Xeon2.6_32C_48M_250W-D2 | 32 | 2.6 | 250 |
| CPU_I_8352Y-Xeon2.2_32C_48M_205W-D2 | 32 | 2.2 | 205 |
| CPU_I_8358P-Xeon2.6_32C_48M_240W-D2 | 32 | 2.6 | 240 |
| Ice Lake SP HCC Intel(R) Xeon(R) Silver 4310 12c 120W 2.1GHz M-1 QS QXRN | 12 | 2.1 | 120 |
| Ice Lake SP HCC Intel(R) Xeon(R) Silver 4314 16c 135W 2.4GHz M-1 QS QXS8 | 16 | 2.4 | 135 |
| Ice Lake SP HCC Intel(R) Xeon(R) Silver 4316 20c 150W 2.3GHz M-1 QS QXS5 | 20 | 2.3 | 150 |
| Ice Lake SP HCC Intel(R) Xeon(R) Gold 5317 12c 150W 3.0GHz M-1 QS QXRM | 12 | 3.0 | 150 |
| Ice Lake SP HCC Intel(R) Xeon(R) Gold 5320 26c 185W 2.2GHz M-1 QS QXRT | 26 | 2.2 | 185 |

| Model | Cores | Base Frequency (GHz) | TDP (W) |
|--|-------|----------------------|---------|
| Ice Lake SP HCC Intel(R) Xeon(R) Gold 6334 8c 165W 3.6GHz M-1 QS QXRQ | 8 | 3.6 | 165 |
| Ice Lake SP HCC Intel(R) Xeon(R) Silver 4309Y 8c 105W 2.8GHz M-1 QS QXRS | 8 | 2.8 | 105 |
| Ice Lake SP HCC Intel(R) Xeon(R) Silver 4310T 10c 105W 2.3GHz M-1 QS QXRP | 10 | 2.3 | 105 |
| Ice Lake SP HCC Intel(R) Xeon(R) Gold 5315Y 8c 140W 3.2GHz M-1 QS QXRR | 8 | 3.2 | 140 |
| Ice Lake SP HCC Intel(R) Xeon(R) Gold 5318N 24c 150W 2.1GHz M-1 QS QXS4 | 24 | 2.1 | 150 |
| Ice Lake SP HCC Intel(R) Xeon(R) Gold 5318Y 24c 165W 2.1GHz M-1 QS QXS2 | 24 | 2.1 | 165 |

7.2.2 Memory Specifications

The NF5180M6 supports up to 32 DDR4 DIMMs. Each processor supports 8 memory channels with 2 DIMM slots per memory channel. The server supports RDIMM/Optane PMem 200 series.

Table 7-3 Memory Specifications

| DIMM Type | Capacity (GB) | Frequency (MHz) | Data Width | Organization |
|-----------|---------------|-----------------|------------|--------------|
| RDIMM | 16 | 3,200 | x72 | 1R x4/2R x8 |
| RDIMM | 16 | 2,933 | x72 | 1R x4/2R x8 |
| RDIMM | 32 | 3,200 | x72 | 2R x4 |
| RDIMM | 32 | 2,933 | x72 | 2R x4 |
| RDIMM | 64 | 3,200 | x72 | 2R x4 |
| RDIMM | 64 | 2,933 | x72 | 2R x4 |
| BPS | 128 | 3,200 | - | - |
| BPS | 256 | 3,200 | - | - |
| BPS | 512 | 3,200 | - | - |

7.2.3 Drive Specifications

Table 7-4 Drive Options 1

| Type | Model | Capacity |
|----------------------|-------|--------------------------------------|
| 2.5-inch SATA SSD | S4510 | 240 GB/480 GB/960 GB/1.92 TB/7.68 TB |
| | PM883 | 240 GB/480 GB/960 GB/1.92 TB/3.84 TB |

| Type | Model | Capacity |
|------|---------|--|
| | 5300PRO | 240 GB/480 GB/960 GB/1.92 TB/3.84 TB/7.68 TB |
| | S4610 | 240 GB/480 GB/960 GB/1.92 TB/3.84 TB/7.68 TB |
| | SM883 | 240 GB/480 GB/960 GB/1.92 TB/3.84 TB |

Table 7-5 Drive Options 2

| Type | Manufacturer | Capacity |
|------------------|--------------|-----------------------------|
| 2.5-inch SAS HDD | Seagate | 600 GB/1.2 TB/1.8 TB/2.4 TB |
| | Toshiba | 600 GB/1.2 TB/1.8 TB/2.4 TB |

Table 7-6 Drive Options 3

| Type | Manufacturer | Capacity |
|-------------------|--------------|--|
| 3.5-inch SATA HDD | Seagate | 2 TB/4 TB/6 TB/8 TB/10 TB/12 TB/14 TB/16 TB |
| | Toshiba | 6 TB/8 TB/10 TB/12 TB/14 TB |
| | HGST | 4 TB/6 TB/8 TB/10 TB/12 TB/14 TB/16 TB/18 TB |

7.2.4 SAS/RAID Controller Card Specifications

Table 7-7 RAID/SAS Controller Card Specifications

| Type | Description | Support for Battery Pack |
|---------------------|--|--------------------------|
| SAS Controller Card | SAS Controller Card_L_8R0_3408IMR_HDM12G_PCl e3_Mezz | No |
| | SAS Controller Card_Inspur_PM8222_SmartHBA_8_SAS3_PCl e3 | No |
| | SAS Controller Card_L_8R0_9400-8i_HDM12G_PCl e3 | No |
| | SAS Controller Card_L_8R0_3408IT_HDM12G_PCl e3_Mezz | No |
| | SAS Controller Card_Inspur_PM8222_PM8222_8_SAS3_PCl e | No |
| | PM8252 8i SAS Controller Card_Inspur_PM8252_HBA_8_SAS4_PCl e4 | No |

| Type | Description | Support for Battery Pack |
|----------------------|--|--------------------------|
| RAID Controller Card | RAID Controller Card_Inspur_PM8204_RA_8_2GB_SAS3_PClE3 | Yes |
| | RAID Controller Card_L_8R0_9460-8i_2GB_HDM12G_PClE3 | Yes |
| | RAID Controller Card_L_16R0_9460-16i_4GB_HDM12G_PClE3 | No |
| | RAID Controller Card_L_8R0_3508_4GB_HDM12G_PClE3_Mezz | No |
| | RAID Controller Card_L_8R0_9361-8i_1G_HDM12G_PClE3 | Yes |
| | RAID Controller Card_L_8R0_9361-8i_2G_HDM12G_PClE3 | No |

7.2.5 NIC Specifications

Table 7-8 OCP 3.0 Card Specifications

| Type | Description | Speed | Network Port Qty |
|------|--|-------|------------------|
| OCP | NIC_SND_10G_X550_RJ_OCP3x4_2_XR | 10G | 1 |
| | NIC_M_100G_MCX566A_LC_OCP3x16_2_XR | 100G | 1 |
| | NIC_I_25G_E810-XXVDA2_LC_OCP3x8_2_XR | 25G | 1 |
| | NIC_M_100G_MCX566ACDAB_LC_OCP3x16_2_XR | 100G | 1 |
| | NIC_BRCM_25G_57414_LC_OCP3x8_2_XR | 25G | 1 |
| | NIC_M_25G_MCX631432A_LC_OCP3x8_2_XR | 25G | 1 |

Table 7-9 Standard PCIe NIC Specifications

| Type | Description | Speed | Network Port Qty |
|----------|---|-----------|------------------|
| PCIe NIC | NIC_I_10G_X550T2_RJ_PClE4_2_XR | 10G | 3 |
| | NIC_I_10G_X710DA2_LC_PClE8_2_XR | 10G | 3 |
| | NIC_I_25G_E810-XXVDA2_LC_PClE8_2_XR | 25G | 3 |
| | NIC_I_40G_XL710_LC_PClE8_2_MM | 40G | 3 |
| | NIC_M_25G_MCX512A-ACAT_LC_PClE8_2_XR | 25G | 3 |
| | NIC_INSPUR_82599ES_10G_LC_PClE8_Dual_XR_Daughter Card | 10G | 3 |
| | NIC_Inspur_W_I350AM4_1G_RJ45_PClE8_Quad | 1G Base-T | 3 |

| Type | Description | Speed | Network Port Qty |
|------|--|-----------|------------------|
| | NIC_SND_W_I350-AM2_RJ_PCI-E4X_1KM_Dual | 1G Base-T | 3 |
| | NIC_I_100G_E810-CQDA2_LC_PCIEx16_2_XR | 100G | 1 |
| | NIC_M_100G_MCX516A-CCAT_LC_PCIex16_2_XR | 100G | 1 |
| | NIC_INSPUR_82599ES_10G_LC_PCIex8_Dual_XR_Daughter Card | 10G | 1 |



NOTE

A server supports up to three 1/10 Gbps PCIe NICs and only one 100 Gbps (or above) NIC.

7.2.6 HBA and HCA Card Specifications

Table 7-10 HCA Card Specifications

| Description | Speed | Port Qty |
|--|-------|----------|
| MCX653105A-ECAT PCIe 3.0/4.0 x16 Single Port | 100G | 1 |
| HCA Card_I_1-EDR4X25_100HFA016LS_PCIe | 100G | 1 |
| MCX653105A-HDAT PCIe 3.0/4.0 x16 | 200G | 1 |



NOTE

PCIe x16 is required for an HCA card of over 100 Gbps.

Table 7-11 HBA Card Specifications

| Description | Speed |
|---|-------|
| HBA Card_QL_4R1_QLE2690-ISR-BK_FC16G_PCIe | 16G |
| HBA Card_QL_8R2_QLE2742-ISR-BK_FC32G_PCIe | 32G |
| HBA Card_QL_4R2_QLE2692-ISR-BK_FC16G_PCIe | 16G |

7.2.7 Graphics Card Specifications

Table 7-12 Graphics Card Specifications

| Type | Description | Max Qty |
|---------------|--|---------|
| Graphics Card | GPU_NV_16GB_Tesla-T4_256b_P/GPU_NV_16G_Tesla-T4_256b_P_Special | 2 |
| | GPU_NV_24G_NVIDIA-A10_384b | 2 |



NOTE

The graphics card uses PCIe x16 bus, and needs to be inserted into a PCIe x16 slot on the riser card.

7.2.8 PSU Specifications

The PSUs follow the Intel Common Redundant Power Supply (CRPS) specification. The PSUs share a common electrical and structural design that allows for hot-swap and tool-less installation into the server with the PSUs locking automatically after being inserted into the power bay. Up to 2 PSUs in 1+1 redundancy are supported. The PSUs are 80 Plus Platinum certified. The server offers various output powers, allowing customers to choose based on the actual configuration.

- The following PSUs in 1+1 redundancy with the rated input voltage of 110 V to 230 VAC and 240 VDC are supported:
 - 550 W Platinum PSUs: 550 W (110 VAC), 550 W (230 VAC), 550 W (240 VDC for China)
 - 800 W Platinum PSUs: 800 W (110 VAC), 800 W (230 VAC), 800 W (240 VDC for China)
 - 1,300 W Platinum PSUs: 1,000 W (110 VAC), 1,300 W (230 VAC), 1,300 W (240 VDC for China)
 - 800 W Titanium PSUs: 800 W (110 VAC), 800 W (230 VAC), 800 W (240 VDC for China)
 - 1,300 W Titanium PSUs: 1,000 W (110 VAC), 1,300 W (230 VAC), 1,300 W (240 VDC for China)

Input voltage range:

- 110 VAC to 230 VAC: 100 V to 264 V
- 240 VDC: 180 V to 320 V

- The following PSUs in 1+1 redundancy with the rated input voltage of 336 VDC are supported:

- 800 W 336 VDC PSUs: 800 W (336 VDC)
- 1,300 W 336 VDC PSUs: 1,300 W (336 VDC)

Input voltage range:

- 336 VDC: 260 V to 400 V

- The following PSUs in 1+1 redundancy with the rated input voltage of -48 VDC are supported:

- 800 W -48 VDC PSU: 800 W (-48 VDC)
- 1,300 W -48 VDC PSU: 1,300 W (-48 VDC)

Input voltage range:

- -48 VDC: -40 V to -72 V

8 Regulatory Information

8.1 Safety

8.1.1 General

- Strictly comply with local laws and regulations while installing the equipment. The safety instructions in this section are only a supplement to local safety regulations.
- To ensure personal safety and to prevent damage to the equipment, all personnel must strictly observe the safety instructions in this section and on the device labels.
- People performing specialized activities, such as electricians and electric forklift operators, must possess qualifications recognized by the local government or authorities.

8.1.2 Personal Safety


- Only personnel certified or authorized by Inspur are allowed to perform the installation procedures.
- Stop any operation that could cause personal injury or equipment damage. Report to the project manager and take effective protective measures.
- Working during thunderstorms, including but not limited to handling equipment, installing cabinets and installing power cords, is forbidden.
- Do not carry the weight over the maximum load per person allowed by local laws or regulations. Arrange appropriate installation personnel and do not overburden them.
- Installation personnel must wear clean work clothes, work gloves, safety helmets and safety shoes, as shown in [Figure 8-1](#).

Figure 8-1 Protective Clothing



- Before touching the equipment, put on ESD clothes and ESD gloves or an ESD wrist strap, and remove any conductive objects such as wrist watches or metal jewelry, as shown in [Figure 8-2](#), in order to avoid electric shock or burns.

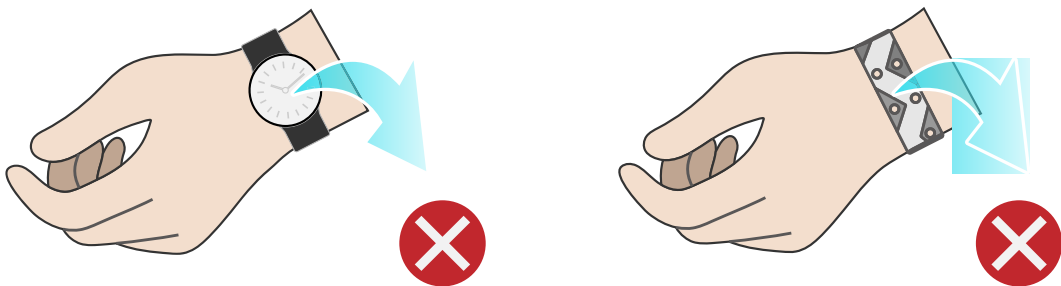
Figure 8-2 Removing Conductive Objects



How to put on an ESD strap ([Figure 8-3](#))

1. Put your hand through an ESD wrist strap.
2. Tighten the strap buckle to ensure a snug fit.
3. Plug the alligator clip of the ESD wrist strap into the corresponding jack on the grounded cabinet or grounded chassis.

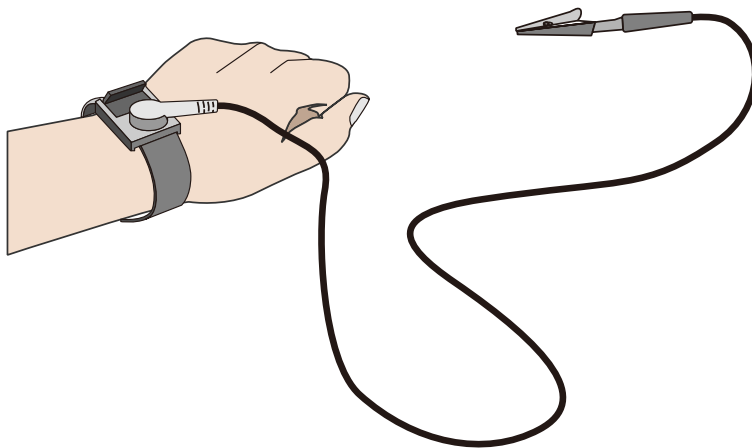Figure 8-3 Wearing an ESD Wrist Strap



- Use tools correctly to avoid personal injury.
- When moving or lifting equipment above shoulder height, use lifting devices and other tools as necessary to avoid personal injury or equipment damage due to equipment slippage.
- The power sources of the server carry a high voltage. Direct contact or indirect contact through damp objects with the high-voltage power source is fatal.
- To ensure personal safety, ground the server before connecting power.
- When using ladders, always have someone hold and guard the bottom of the ladders. In order to prevent injury, never use a ladder alone.
- When connecting, testing or replacing optical fiber cable, avoid looking into the optical port without eye protection in order to prevent eye damage from laser light.

8.1.3 Equipment Safety

- To ensure personal safety and prevent equipment damage, use only the power cords and cables that come with the server. Do not use them with any other equipment.
- Before touching the equipment, put on ESD clothing and ESD gloves to prevent static electricity from damaging the equipment.
- When moving the server, hold the bottom of the server. Do not hold the handles of any module installed in the server, such as PSUs, fan modules, drive modules, or motherboard. Handle the equipment with care at all times.
- Use tools correctly to avoid damage to the equipment.
- Connect the power cords of active and standby PSUs to different PDUs to ensure high system reliability.

- To ensure equipment safety, always ground the equipment before powering it on.

8.1.4 Transportation Precautions

Contact the manufacturer for precautions before transportation as improper transportation may damage the equipment. The precautions include but not limited to:

- Hire a trusted logistics company to move all equipment. The transportation process must comply with international transportation standards for electronic equipment. Always keep the equipment being transported upright. Avoid collision, moisture, corrosion, packaging damage or contamination.
- Transport the equipment in its original packaging.
- If the original packaging is unavailable, separately package heavy and bulky components (such as chassis, blade servers and blade switches), and fragile components (such as optical modules and PCIe cards).
- Power off all equipment before shipping.

8.1.5 Manual Handling Weight Limits



CAUTION

Observe local laws or regulations regarding the manual handling weight limits per person. The limits shown on the equipment and in the document are recommendations only.

Table 8-1 lists the manual handling weight limits per person specified by some organizations.

Table 8-1 Manual Handling Weight Limit per Person

| Organization | Weight Limit (kg/lbs) |
|--|--|
| European Committee for Standardization (CEN) | 25/55.13 |
| International Organization for Standardization (ISO) | 25/55.13 |
| National Institute for Occupational Safety and Health (NIOSH) | 23/50.72 |
| Health and Safety Executive (HSE) | 25/55.13 |
| General Administration of Quality Supervision, Inspection and Quarantine of the People's Republic of China (AQSIQ) | <ul style="list-style-type: none"> • Male: 15/33.08 • Female: 10/22.05 |

9 Inspur Limited Warranty

This limited warranty applies only to the original purchasers of Inspur's products who are direct customers or distributors of Inspur ("Customer").

Inspur warrants all Inspur-branded hardware products, if properly used and installed, to be free from defects in material and workmanship within the warranty period. The term "Inspur Hardware Product" is limited to the hardware components and required firmware. The term "Inspur Hardware Product" DOES NOT include software applications or programs, non-Inspur products, or non-Inspur branded peripherals. Inspur may, at its discretion, repair or replace the defective parts. Repair or replacement parts may be new, used, or equivalent to new in performance and reliability. Repair or replacement parts are warranted to be free of defects in material or workmanship for ninety (90) calendar days or for the remainder of the warranty period of the product, whichever is longer.

Any warranty services of Inspur equipment are not provided by default outside China's mainland, and global customers may purchase corresponding service products on demand.

Service offerings may vary by geographic region. Please contact your Inspur representative to identify service levels and needs for your region.

9.1 Warranty Service

Inspur warranty service includes 24 × 7 remote technical support, RMA (Return Material Authorization) Service, ARMA (Advanced Return Material Authorization) Service, 9 × 5 × NBD (Next Business Day) Onsite Service and 24 × 7 × 4 Onsite Service.

9.1.1 Remote Technical Support

The 24 × 7 remote technical support can be obtained through hotline, e-mail, and Service Portal*¹. Through hotline and e-mail support, Inspur engineers help customers diagnose the causes of malfunctions and provide solutions. Service Portal*¹ provides access to firmware, customized update files, and related manuals for Inspur Hardware Products. Customer may also access the Service Portal*¹ to submit an RMA request or an ARMA request for parts replacement or repair.

Information needed when requesting support:

- Contact name, phone number, e-mail address
- System serial number, part number, model and location (address) of the product needing service

- Detailed description of problem, logs (SEs and blackbox logs, and any other related logs from OS), screenshot of issue, pictures of damaged/faulty parts, etc.

Table 9-1 Support Contact Information

| Type | Description | Support Window |
|----------------|---|----------------|
| Global Hotline | <ul style="list-style-type: none"> • Global: (+1) 844-860-0011/(+1) 325-880-0011 • China: (+86) 400-860-0011 • CIS: (+7) 499-371-3961 • Germany: (+49) 800-850-0011/(+49) 7112-064-9400 • Japan: (+81) 0800-600-0118/(+81) 0505-840-2667 • Korea: (+82) 80-560-0011/(+82) 70-4228-7340 | 24 × 7 × 365 |
| Email | <ul style="list-style-type: none"> • Global: serversupport@inspur.com • China: lckf@inspur.com • CIS: serversupport_ru@inspur.com • Germany: serversupport_de@inspur.com • Japan: serversupport_jp@inspur.com • Korea: serversupport_kr@inspur.com • US: serversupportusa@inspur.com | 24 × 7 × 365 |

9.1.2 RMA Service

Standard Replacement: When a hardware failure occurs, Customer may submit an RMA request to Inspur via e-mail or Service Portal*1. Inspur will review and approve the RMA submission at its own discretion, and provide an RMA number and return information that Customer may use to return the defective part(s) for the RMA service. Inspur will ship out replacement part(s) within one (1) business day after receiving the defective part(s) and cover one-way shipment.

 NOTE

- Customer should return the defective parts in their original packaging to the
-

Inspur designated service center at their own expense.

- After Inspur's further diagnosing and testing, if the defective parts conform to Inspur's repair policy, Inspur will ship out the repair or replacement parts at our own expense; otherwise, Inspur will return the defective parts at Customer's expense.
 - If Customer needs to designate a logistics company, allocation of the shipping cost to Inspur/Customer will be redefined.
-

9.1.3 ARMA Service

Advanced Replacement: If a problem with Inspur Hardware products cannot be resolved via hotline or e-mail support and replacement part(s) are required, Inspur will ship out replacement part(s) in advance within one (1) business day. Customer should return defective part(s) within five (5) business days after receiving the replacement(s). Inspur will cover two-way shipment.



NOTE

- Customer should return the defective parts in their original packaging to the Inspur designated service center.
 - Inspur will ship out the replacement parts at our own expense after completing remote diagnosis.
 - If Customer needs to designate a logistics company, allocation of the shipping cost to Inspur/Customer will be redefined.
-

9.1.4 9 × 5 × NBD Onsite Service

When Inspur ultimately determines that an onsite service call is required to repair or replace a defect, the call will be scheduled in accordance with the Response Time Commitment. The response time is measured from the time when the remote troubleshooting is completed and logged to the arrival of a service engineer and parts to Customer location for repair.



NOTE

9 × 5 × NBD: The Inspur service engineer typically arrives at the customer's data center on the next business day. Service engineers are available on local business day from 9:00 am to 6:00 pm local time. Calls received/dispatches after 5:00 pm local time will require an additional day for the service engineer to arrive.

9.1.5 24 × 7 × 4 Onsite Service

When Inspur ultimately determines that an onsite service call is required to repair or replace a defect, the call will be scheduled in accordance with the Response Time Commitment. The response time is measured from the time when the remote troubleshooting is completed and logged to the arrival of a service engineer and parts to Customer location for repair.



NOTE

24 × 7 × 4: The Inspur service engineer typically arrives at the customer site within 4 hours. Service engineers are available at any time, including weekends and local national holidays.

9.2 Inspur Service SLA

Inspur offers a variety of Service Level Agreements (SLA)^{*2} to meet customer requirements.

- RMA Service
- ARMA Service
- 9 × 5 × NBD Onsite Service
- 24 × 7 × 4 Onsite Service

9.3 Warranty Exclusions

Inspur does not guarantee that there will be no interruptions or mistakes during the use of the products. Inspur will not undertake any responsibility for the losses arising from any operation not conducted according to instructions intended for Inspur Hardware Products.

The Limited Warranty does do not apply to

- expendable or consumable parts, such as, but not limited to, batteries or protective coatings that are designed to diminish over time, unless failure has occurred during DOA period due to a defect in material or workmanship;
- any cosmetic damage, such as, but not limited to, scratches, dents, broken plastics, metal corrosion, or mechanical damage, unless failure has occurred during DOA period due to a defect in material or workmanship;
- damage or defects caused by accident, misuse, abuse, contamination, improper or inadequate maintenance or calibration or other external causes;

- damage or defects caused by operation beyond the parameters as stipulated in the user documentation;
- damage or defects by software, interfacing, parts or supplies not provided by Inspur;
- damage or defects by improper storage, usage, or maintenance;
- damage or defects by virus infection;
- loss or damage in transit which is not arranged by Inspur;
- Inspur Hardware Products that have been modified or serviced by non-authorized personnel;
- any damage to or loss of any personal data, programs, or removable storage media;
- the restoration or reinstallation of any data or programs except the software installed by Inspur when the product is manufactured;
- any engineering sample, evaluation unit, or non-mass production product that is not covered under warranty service;
- any solid-state drive (SSD) which has reached its write endurance limit.

In no event will Inspur be liable for any direct loss of use, interruption of business, lost profits, lost data, or indirect, special, incidental or consequential damages of any kind regardless of the form of action, whether in contract, tort (including negligence), strict liability or otherwise, even if Inspur has been advised of the possibility of such damage, and whether or not any remedy provided should fail of its essential purpose.

*1 Service Portal availability is subject to customer type and customer location. Please contact your Inspur representative to learn more.

*2 Not all SLA offerings are available at all customer locations. Some SLA offerings may be limited to geolocation and/or customer type. Please contact your Inspur representative to learn more.

10 System Management

10.1 Intelligent Management System ISBMC

ISBMC, an Inspur self-developed remote server management system, supports mainstream management specifications in the industry such as IPMI 2.0 and Redfish 1.8. ISBMC features high operational reliability, easy serviceability for different business scenarios, accurate and comprehensive fault diagnosis capabilities, and industry-leading security reinforcement capabilities.

ISBMC supports:

- IPMI 2.0
- Redfish 1.8
- SNMP v1/v2c/v3
- HTML5/Java remote consoles (Keyboard Video Mouse)
- remote virtual media
- login on web browsers
- intelligent fault diagnosis

Table 10-1 ISBMC Features

| Feature | Description |
|----------------------|---|
| Management Interface | Supports extensive remote management interfaces for various server O&M scenarios. The supported interfaces include: <ul style="list-style-type: none">● IPMI● SSH CLI● SNMP● HTTPS● Web GUI● Redfish● RESTful● DCMI● Syslog |

| Feature | Description |
|---|---|
| Accurate and Intelligent Fault Location | IDL, a self-developed fault diagnosis system, offers accurate and comprehensive hardware fault location capabilities, and outputs detailed fault causes and handling suggestions. |
| Alert Management | Supports rich automatic remote alert capabilities, including proactive alerting mechanisms such as SNMP Trap (v1/v2c/v3), email alerts and syslog remote alerts to ensure 24 × 7 reliability. |
| Remote Console KVM | Supports HTML5- and Java-based remote console to remotely control and operate the monitor/mouse/keyboard of the server, providing highly available remote management capabilities without on-site operation. |
| Virtual Network Console (VNC) | Supports mainstream third-party VNC clients without relying on Java, improving management flexibility. |
| Remote Virtual Media | Supports virtualizing images, USB devices, folders and local media devices as media devices of remote servers, simplifying OS installation, file sharing, and other O&M tasks. |
| Web GUI | Supports the visual management interface developed by Inspur, displaying abundant information of the server and components, and offers easy-to-use Web GUIs. |
| Crash Screenshot and Manual Screenshot | <ul style="list-style-type: none"> • Supports automatic crash screenshot with the last screen before crash saved; • Provides manual screenshot, which can quickly capture the screen for easy inspection at scheduled time. |
| Dual Flash and Dual Image | Supports dual flash and dual image, enabling automatic flash failover in case of software faults or flash damage, improving operational reliability. |
| Power Capping | Supports power capping, increasing deployment density and reducing energy consumption. |
| IPv4/IPv6 | Supports both IPv4 and IPv6, enhancing network deployment flexibility. |
| Auto-Switching of Management Network Port | Supports auto-switching between the dedicated management network port and shared management network port, providing customers with flexible network deployment solutions for different management network deployment scenarios. |
| ISBMC Self-Diagnosis and Self-Recovery System | <ul style="list-style-type: none"> • Supports the reliable dual watchdog mechanism for hardware and software, enabling automatic restoration of BMC in case of BMC abnormality. |

| Feature | Description |
|--------------------------------|--|
| | <ul style="list-style-type: none"> • Provides a thermal protection mechanism, which is automatically triggered when the BMC is abnormal to ensure that the fan operates at safe speeds to avoid system overheating • Supports self-diagnosis of processors, memory modules, and storage devices of ISBMC, and automatically cleans the workload to restore to normal when the device usage rate is too high. |
| Power Supply Control | Supports virtual power buttons for startup, shutdown, restart, and restart after shutdown. |
| UID LED and Remote Control LED | Supports remote lighting of the UID LED for locating the server in the server room, and supports remote control LED. The UID LED flashes when a user remotely logs in through the web, KVM, or SSH to inform the on-site personnel that an administrator is accessing the server. |
| Secure Firmware Update | <ul style="list-style-type: none"> • Supports firmware update based on secure digital signatures, mismatch prevention mechanism for firmware from different manufacturers and firmware for different server models; • Supports firmware update of BMC/BIOS/CPLD/PSU. |
| Serial Port Redirection | Supports remote redirection of the system serial port, BMC serial port and other serial ports, and directs the server-side serial port output to the local administrator via the network for server debugging. |
| Storage Information Display | Displays RAID logical array information and drive information, supports remote RAID creation for improved deployment efficiency. |
| User Role Management | Supports user detail management based on user roles and flexible creation of user roles with different privileges, and provides more user roles to allow administrators to grant different privileges to O&M personnel. |
| Security Feature | Adopts the industry-leading Inspur server security baseline standard V2.0. SSH, HTTPS, SNMP and IPMI use secure and reliable algorithms. ISBMC offers capabilities including secure update and boot and security reinforcement mechanisms such as anti-replay, anti-injection, and anti-brute force. |

10.2 Inspur Physical Infrastructure Manager (ISPIM)

The NF5180M6 server is compatible with the latest version of Inspur Physical Infrastructure Manager (ISPIM).

The independently developed ISPIM for data centers features asset management, monitoring, inspection, energy consumption management and stateless management. It also provides interfaces such as Restful and SNMP for easy integration and interfacing. ISPIM has the following key features:

- Lightweight deployment in multiple scenarios and full lifecycle management of devices
- High reliability and on-demand node scalability enabled by 1 to N data collectors
- Intelligent asset management and real-time tracking of asset changes
- Comprehensive monitoring and automatic fault diagnosis
- Batch configuration, deployment and update, shortening the deployment time
- Intelligent analysis and control of power consumption, helping save energy and improving operational stability of data centers
- Improved version management efficiency
- Standardized northbound interfaces for easy integration and interfacing
- Centralized management of edge devices

Table 10-2 ISPIM Features

| Feature | Description |
|-------------------------------|---|
| Centralized Device Management | Supports centralized management of network-wide devices, including servers (the full range of Inspur server family, including general-purpose rack servers, AI servers, blade servers, all-in-one servers and other high-end server products, and third-party servers), storage devices (Inspur general-purpose disk arrays, distributed storage devices, and storage devices of other manufacturers) and network devices (Inspur switches, third-party switches, and third-party firewall devices) |
| Monitoring | <ul style="list-style-type: none">• Centralized display, search, blocking and email notifications of device alerts |

| Feature | Description |
|------------------------------|---|
| | <ul style="list-style-type: none"> • Creation of alert rules, notification rules and blocking rules • Alert severity level setting • Alert forwarding and southbound settings • Device performance monitoring • Distributed monitoring |
| Stateless Computing | <ul style="list-style-type: none"> • BMC/BIOS update and configuration of Inspur servers • RAID configuration of Inspur servers • Firmware configuration templates • Automatic firmware baseline management • Repository for update files |
| OS Deployment | <ul style="list-style-type: none"> • Batch deployment of OSs via BMC interfaces • One-click deployment with automatic and detailed logging and with no manual intervention needed • Concurrent deployment of up to 40 devices |
| Asset Management | <ul style="list-style-type: none"> • Part-level asset management, multi-dimensional asset report • 3D data centers • Asset maintenance management |
| Inspection | <ul style="list-style-type: none"> • Active inspection • Alert-triggered passive inspection • Intelligent fault diagnosis and analysis, and call home |
| Power Consumption Management | <ul style="list-style-type: none"> • Multi-dimensional report of power consumption • Intelligent power capping strategies • A variety of power consumption optimization analyses, including cooling analysis, server utilization analysis, server power consumption analysis, and load distribution analysis • Intelligent power consumption prediction |

| Feature | Description |
|---------------------|---|
| Security Management | <ul style="list-style-type: none"> Implements security control of ISPIM via a set of security policies such as user management, role management, authentication management (local authentication and LDAP authentication) and certificate management |

10.3 Inspur Server Intelligent Boot (ISIB)

The NF5180M6 server is compatible with the latest version of Inspur Server Intelligent Boot (ISIB) system, a self-developed automatic O&M management system throughout the server lifecycle. Based on the SSH and PXE technologies, it is compatible with the full range of Inspur servers, and offers more efficient and reliable automatic deployment and software and hardware configuration management. ISIB has the following key features:

- Full lifecycle management from deployment to automatic O&M
- One-stop and one-click deployment for bare metal servers
- Flexible task scheduling with O&M capabilities in multiple scenarios
- Large-scale deployment of technical architecture, shortening the deployment time
- Zero network deployment with plug-and-play support
- Accurate logging and instruction-level tracing of execution results
- Rich built-in O&M scripts and management schemes

Table 10-3 ISIB Specifications

| Item | Description |
|------------|--|
| Home | <ul style="list-style-type: none"> Provides multi-dimensional report of assets, repositories, operations and jobs Displays jobs 24 hours dynamically Displays column bars of jobs in the last 30 days |
| Asset | Supports automatic device discovery, OS information collection, and out-of-band/in-band power supply management |
| Repository | Enables you to manage images, software, firmware, configuration files, scripts and sources for easy OS deployment and firmware update |

| Item | Description |
|-----------|--|
| Operation | <ul style="list-style-type: none"> • Firmware update • Hardware configuration • Automatic OS installation via PXE • Installation template management • Image cloning and restoration • Software distribution • Configuration changes • System inspection |
| Task | <ul style="list-style-type: none"> • Supports job scheduling, and scheduled and periodic task execution • Provides visual multi-dimensional task display and detailed logging |
| GShell | Remote management of a single SSH terminal or multiple SSH terminals |
| DFX | <ul style="list-style-type: none"> • Supports high availability (HA) and secure access via HTTPS • Supports system snapshots and self-service management • Supports batch O&M at a scale of 10,000 devices • Provides the northbound RESTful interfaces. |

11 Certifications

Table 11-1 Certifications

| Country/Region | Certification | Mandatory/ Voluntary |
|----------------------------------|-------------------------------|-------------------------|
| China | CCC | Mandatory |
| | CECP | Voluntary |
| | China Environmental Labelling | Voluntary |
| International Mutual Recognition | CB | Voluntary |
| EU | CE | Mandatory |
| US | FCC | Mandatory |
| | UL | Voluntary |
| | Energy Star | Voluntary |
| Russia | EAC | Mandatory |
| | FSS | Mandatory |
| India | BIS | Mandatory |
| South Korea | E-Standby | Mandatory |
| | KC | Mandatory |
| Australia | RCM | Mandatory |
| Israel | SII | Mandatory |
| Mexico | NOM | Mandatory |

12 Appendix A

12.1 Operating Temperature Specification Restrictions

Table 12-1 Operating Temperature Specification Restrictions

| Configuration | | Max Temp. | Front Drive | Rear Drive | Optane PMem | CPU | GPU |
|---|--------------------------|---|---------------------|----------------|------------------------|--------|-------------------|
| 4 × 3.5-inch Drive + 2 × E1.S SSD + 2 × M.2 SSD Configuration | Rear NIC configuration | 35°C (95°F) when all fans are normal and 30°C (86°F) when one fan fails | 4 × 3.5-inch drive | N/A | Supported (CPU ≤165 W) | ≤205 W | N/A |
| | Rear GPU configuration | | 4 × 3.5-inch drive | N/A | Not supported | ≤165 W | T4 and other GPUs |
| | Rear drive configuration | | 4 × 3.5-inch drive | SSDs supported | Not supported | ≤205 W | N/A |
| 10 × 2.5-inch Drive Configuration | Rear NIC configuration | 35°C (95°F) when all fans are normal and 30°C (86°F) when one fan fails | 8 × 2.5-inch drive | N/A | Supported (CPU ≤165 W) | ≤205 W | N/A |
| | Rear GPU configuration | | 8 × 2.5-inch drive | N/A | Not supported | ≤165 W | T4 and other GPUs |
| | Rear drive configuration | | 8 × 2.5-inch drive | SSDs supported | Not supported | ≤205 W | N/A |
| 12 × 2.5-inch Drive Configuration | Rear NIC configuration | 35°C (95°F) when all fans are normal and 30°C (86°F) when one fan fails | 12 × 2.5-inch drive | N/A | Supported (CPU ≤165 W) | ≤205 W | N/A |
| | Rear GPU configuration | | 12 × 2.5-inch drive | N/A | Not supported | ≤165 W | T4 and other GPUs |

| Configuration | | Max Temp. | Front Drive | Rear Drive | Optane PMem | CPU | GPU |
|-----------------------------|--------------------------|---|---------------------|----------------|------------------------|--------|-------------------|
| | Rear drive configuration | | 12 × 2.5-inch drive | SSDs supported | Not supported | ≤205 W | N/A |
| 32 × E1.S SSD Configuration | Rear NIC configuration | 35°C (95°F) when all fans are normal and 30°C (86°F) when one fan fails | 32 × E1.S SSD | N/A | Supported (CPU ≤165 W) | ≤165 W | N/A |
| | Rear GPU configuration | | 32 × E1.S SSD | N/A | Not supported | N/A | T4 and other GPUs |
| EVAC Heatsink Configuration | Rear NIC configuration | 35°C (95°F) when all fans are normal | 4 × 2.5-inch drive | N/A | Not supported | >205 W | Not supported |
| | Rear GPU configuration | 30°C (86°F) when all fans are normal | 4 × 2.5-inch drive | N/A | Not supported | >205 W | T4 and other GPUs |
| | Rear drive configuration | 35°C (95°F) when all fans are normal | 4 × 2.5-inch drive | SSDs supported | Not supported | >205 W | N/A |

12.2 Model

Table 12-2 Model

| Certified Model | Description |
|-----------------|-------------|
| NF5180M6 | Global |

12.3 RAS Features

The NF5180M6 supports a variety of RAS (Reliability, Availability, and Serviceability) features. By configuring these features, the NF5180M6 can provide greater reliability, availability, and serviceability.

12.4 Sensor List

Table 12-3 Sensor List

| Sensor | Description | Sensor Location |
|----------------|---|--|
| Inlet_Temp | Air inlet temperature | Right mounting ear |
| Outlet_Temp | Air outlet temperature | BMC |
| PCH_Temp | PCH temperature | Motherboard |
| CPUn_Temp | CPUn core temperature | CPUn n indicates the CPU number with a value of 0 - 1 |
| CPUn_DTS | CPUn DTS value | CPUn n indicates the CPU number with a value of 0 - 1 |
| CPUn_DIMM_T | CPUn DIMM temperature | DIMM (CPUn) n indicates the CPU number with a value of 0 - 1 |
| PSUn_Temp | PSUn temperature | The corresponding power supply for PSUn n indicates the PSU number with a value of 0 - 1 |
| HDD_MAX_Temp | The maximum temperature among all drives | Drives attached to drive backplane |
| OCP_NIC_Temp | OCP NIC temperature | OCP NIC |
| PCle_NIC_Temp | The maximum temperature among all PCIe NIC cards | Motherboard PCIe NIC card |
| RAID_Temp | The maximum temperature among all RAID controller cards | PCIe RAID controller card |
| GPU_Temp | The maximum temperature among all GPUs | Motherboard PCIe |
| NVMe_M.2_Temp | The maximum temperature among all M.2 SSDs | M.2 adapter |
| SYS_12V | 12 V voltage supplied by motherboard to CPU | Motherboard |
| SYS_5V | 5 V voltage supplied by motherboard to BMC | Motherboard |
| SYS_3V3 | 3.3 V voltage supplied by motherboard to BMC | Motherboard |
| CPUn_DDR_VDDQ1 | 1.2 V DIMM voltage | Motherboard |

| Sensor | Description | Sensor Location |
|-----------------------------|---------------------------------|---|
| | | n indicates the CPU number with a value of 0 - 1 |
| CPU _n _DDR_VDDQ2 | 1.2 V DIMM voltage | Motherboard n indicates the CPU number with a value of 0 - 1 |
| CPU _n _Vcore | CPU _n Vcore voltage | Motherboard n indicates the CPU number with a value of 0 - 1 |
| PSU _n _VIN | PSU _n input voltage | Motherboard n indicates the PSU number with a value of 0 - 1 |
| PSU _n _VOUT | PSU _n output voltage | Motherboard n indicates the PSU number with a value of 0 - 1 |
| RTC_Battery | RTC battery voltage | RTC battery on motherboard |
| FAN _n _Speed | FAN _n speed | FAN _n n indicates the fan module number with a value of 0 - 7 |
| FAN _n _F_Speed | | |
| FAN _n _R_Speed | | |
| Total_Power | Total power | PSU |
| PSU _n _PIN | PSU _n input power | PSU _n n indicates the PSU number with a value of 0 - 1 |
| PSU _n _POUT | PSU _n output power | PSU _n n indicates the PSU number with a value of 0 - 1 |
| FAN_Power | Total fan power | Fans |
| CPU_Power | Total CPU power | Motherboard |
| Memory_Power | Total memory power | Motherboard |
| Disk_Power | Total drive power | Motherboard |
| CPU _n _Status | CPU _n status | CPU _n n indicates the CPU number with a value of 0 - 1 |

| Sensor | Description | Sensor Location |
|---------------------------|--|---|
| CPU_Config | CPU configuration status: Mixed use of CPU, primary CPU not installed | CPU |
| CPU _n _MEM_Hot | CPU _n DIMM overtemperature | CPU _n n indicates the CPU number with a value of 0 - 1 |
| CPU _n _CxDy | CPU _n DIMM status | The corresponding DIMM for CPU _n n indicates the CPU number with a value of 0 - 1 x indicates the memory channel number under the CPU with a value of 0 - 7 y indicates the DIMM number with a value of 0 - 1 |
| FAN _n _Status | FAN _n failure status | FAN _n n indicates the fan number with a value of 0 - 7 |
| FAN_Redundant | Fan redundancy lost alert status | Fans |
| PCIe_Status | PCIe card status error | PCIe card |
| Power_Button | Power button pressed | Motherboard and power button |
| Watchdog2 | Watchdog | Motherboard |
| Sys_Health | BMC health status | BMC |
| UID_Button | UID button status | Motherboard |
| PWR_Drop | Voltage drop status | Motherboard |
| PWR_On_TMOUT | Power-on timeout | Motherboard |
| PWR_CAP_Fail | Power capping status | Motherboard |
| BP_F_Disk_Stat | Front drive backplane status | Drive backplane |
| PSU_Redundant | PSU redundancy lost alert status | PSU |
| PSU_Mismatch | Power supply model mismatch | PSU |
| PSU _n _Status | PSU _n failure status | PSU _n n indicates the PSU number with a value of 0 - 5 |

| Sensor | Description | Sensor Location |
|---------------|---|------------------------|
| Intrusion | Chassis-opening activity monitoring | Motherboard |
| SysShutdown | Reason for system shutdown | / |
| ACPI_PWR | ACPI status | / |
| ME_FW_Status | ME health status | / |
| SysRestart | Reason for system restart | / |
| BIOS_Boot_Up | BIOS boot up complete | / |
| System_Error | Emergency system failure | / |
| POST_Status | POST status | / |
| BMC_Boot_Up | Record the BMC boot event | / |
| SEL_Status | Record the event that system event logs are almost full/cleared | / |
| BMC_Status | BMC status | / |

13 Appendix B Acronyms and Abbreviations

13.1 A - E

A

| | |
|------|---------------------------------------|
| AC | Alternating Current |
| AI | Artificial Intelligence |
| ANSI | American National Standards Institute |
| ARS | Address Range Scrub |

B

| | |
|------|---------------------------------|
| BIS | Bureau of Indian Standards |
| BIOS | Basic Input Output System |
| BMC | Baseboard Management Controller |
| BPS | Barlow Pass |

C

| | |
|------|--|
| CB | Certification Body |
| CCC | China Compulsory Certification |
| CE | Conformite Europeenne |
| CECP | China Energy Conservation Program |
| CEN | European Committee for Standardization |
| CLI | Command-Line Interface |
| CPLD | Complex Programmable Logic Device |
| CPU | Central Processing Unit |
| CRC | Cyclic Redundancy Check |
| CRPS | Common Redundant Power Supply |

D

| | |
|------|-------------------------------------|
| DC | Direct Current |
| DCMI | Data Center Manageability Interface |
| DDDC | Double Device Data Correction |
| DDR4 | Double Date Rate 4 |
| DFX | Design for X |
| DIMM | Dual In-Line Memory Module |

E

| | |
|------|---|
| EAC | Eurasian Conformity |
| ECC | Error-Correcting Code |
| ECMA | European Computer Manufacturers Association |
| EN | European Standard |
| ESD | Electrostatic Discharge |
| EVAC | Extended Volume Air Cooling |
| E1.S | Enterprise & Data Center SSD Form Factor 1 Unit Short |

13.2 F - J

F

| | |
|------|-----------------------------------|
| FCC | Federal Communications Commission |
| FHHL | Full Height Half Length |
| FRB | Fault Resilient Booting |
| FSS | Federal Security Service |

G

| | |
|-----|--------------------------|
| GPU | Graphics Processing Unit |
| GUI | Graphical User Interface |

H

| | |
|-----|------------------|
| HBA | Host Bus Adapter |
|-----|------------------|

| | |
|-------|------------------------------------|
| HCA | Host Channel Adapter |
| HDD | Hard Disk Drive |
| HHHL | Half Height Half Length |
| HSE | Health and Safety Executive |
| HTML | Hyper Text Markup Language |
| HTTPS | Hypertext Transfer Protocol Secure |

I

| | |
|-------|--|
| I/O | Input/Output |
| IDL | Inspur Diagnosis Log |
| IMC | Integrated Memory Controller |
| IOPS | Input/Output Operations Per Second |
| IP | Internet Protocol |
| IPMI | Intelligent Platform Management Interface |
| IPv4 | Internet Protocol version 4 |
| IPv6 | Internet Protocol version 6 |
| ISBMC | Inspur Server Baseboard Management Controller |
| ISIB | Inspur Server Intelligent Boot |
| ISO | International Organization for Standardization |
| ISPIM | Inspur Physical Infrastructure Manager |

13.3 K - O

K

| | |
|-----|----------------------|
| KC | Korea Certification |
| KVM | Keyboard Video Mouse |

L

| | |
|-----|----------------------|
| LAN | Local Area Network |
| LED | Light Emitting Diode |
| LOM | LAN on Motherboard |
| LP | Low Profile |

| | |
|--------|---|
| LRDIMM | Load Reduced Dual In-Line Memory Module |
|--------|---|

N

| | |
|--------|---|
| NCSI | Network Controller Sideband Interface |
| NIC | Network Interface Controller |
| NIOSH | National Institute for Occupational Safety and Health |
| NOM | Norma Oficial Mexicana |
| NVDIMM | Non-Volatile Dual In-Line Memory Module |
| NVMe | Non-Volatile Memory Express |

O

| | |
|-----|----------------------|
| OCP | Open Compute Project |
| OS | Operating System |

13.4 P - T

P

| | |
|------|---|
| PCH | Platform Controller Hub |
| PCI | Peripheral Component Interconnect |
| PCIe | Peripheral Component Interconnect express |
| PCLS | Partial Cache Line Sparing |
| PDU | Power Distribution Unit |
| PMem | Persistent Memory |
| PPR | Post Package Repair |
| PSU | Power Supply Unit |
| PXE | Pre-boot Execution Environment |

R

| | |
|------|---|
| RAS | Reliability, Availability, Serviceability |
| RAID | Redundant Arrays of Independent Disks |
| RCM | Regulatory Compliance Mark |

| | |
|-------|---------------------------------------|
| RDIMM | Registered Dual In-line Memory Module |
| RH | Relative Humidity |
| RJ45 | Registered Jack 45 |
| RV | Rotatable Vibration |
| RST | Reset |
| RTC | Real Time Clock |

S

| | |
|------|---------------------------------------|
| SAS | Serial Attached SCSI |
| SATA | Serial Advanced Technology Attachment |
| SCSI | Small Computer System Interface |
| SDDC | Single Device Data Correction |
| SII | Standards Institution of Israel |
| SLES | SUSE Linux Enterprise Server |
| SNMP | Simple Network Management Protocol |
| SSD | Solid State Drive |
| SSH | Secure Shell |

T

| | |
|-----|-----------------------------|
| TCM | Trusted Cryptography Module |
| TDP | Thermal Design Power |
| TF | TransFlash |
| TPM | Trusted Platform Module |

13.5 U - Z

U

| | |
|-----|-------------------------|
| UID | Unit Identification |
| UPI | Ultra Path Interconnect |
| USB | Universal Serial Bus |

V

| | |
|-----|-------------------------|
| VGA | Video Graphics Array |
| VNC | Virtual Network Console |
| VPP | Virtual Pin Port |
| VRD | Voltage Regulator Down |